

$\begin{array}{c} \text{K-3837} \\ \text{DEVONSHIRE}_{\text{@}} \\ \text{COMFORT HEIGHT}_{\text{@}} \text{TOILET} \end{array}$

Product Information

Applicable product:	
Comfort Height _® toilet (left-hand trip lever)	K-3837
Comfort Height _® toilet (right-hand trip lever)	K-3837-RA

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	11-1/2" (292 mm) x 8-3/4" (222 mm)
Water depth from rim	5-1/2" (140 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:	
Elongated bowl	K-4397
Tank	K-4438
Tank cover	1044820
Trip lever, left-hand OR	1126917
Trip lever, right-hand	1160317
Bolt cap accessory pack	1013092

Installation Notes


Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** when installed per Clause 3.8.3.8 and 3.8.3.9.

Fixture conforms to ASME Standard A112.19.2/CSA B45.1. All dimensions are nominal.

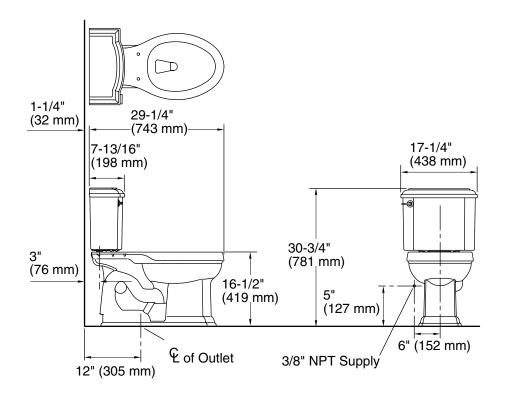

Front of Bowl

