

Cimarron® Comfort Height® Toilet K-3851-UR

Features

- Vitreous china.
- Two-piece toilet.
- Comfort Height® Round-front bowl.
- AquaPiston® flushing system.
- Includes right-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 10" (254 mm) rough-in.
- Less seat and supply.
- 11" (279 mm) x 8-3/4" (222 mm) water area.
- 27-1/4" (692 mm) x 17-5/8" (448 mm) x 30-1/2" (775 mm).
- Floor mount / Floor outlet.
- Insuliner® tank liner included.

Optional Accessories

K-9466-R Right-hand Trip Lever

K-9470-R Right-hand Trip Lever

K-4009 Toilet Seat

K-4639 Toilet Seat

K-4644 Toilet Seat

K-4662 Toilet Seat

K-4663 Toilet Seat

K-4689 Toilet Seat

K-4695 Toilet Seat

K-4775 Toilet Seat

K-4816 Toilet Seat

K-5589 Round-Front Toilet Seat

K-5639 Round-Front Toilet Seat

K-7637 Angle Supply with Stop (single)

K-4686-A Toilet Seat

K-4716-T Toilet Seat

K-9466-L Left-hand Trip Lever

Components

Product includes:

K-4829 Toilet Bowl

K-4166-UR Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt

cap accessory pack, and Tank accessory pack.





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
| | 0 | White |
| | 96 | Biscuit |
| | 47 | Almond |






Cimarron®

Comfort Height® Toilet

K-3851-UR

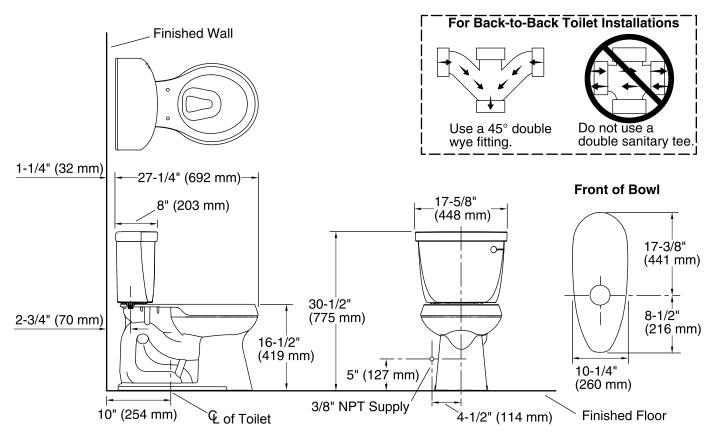

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round front
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11" x 8-3/4" (279 mm x 222 mm)

Rim to water surface: 5-1/4" (133 mm)
Rough-in: 10" (254 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

