

Features

- Catalyst air-induction technology maximizes the air/water mix for a powerful, even flow.
- Optimized sprayface with 48 nozzles delivers a more focused coverage of large water droplets.
- MasterClean™ sprayface prohibits mineral build-up for easy cleaning.
- 1/2" NPT connection.
- 2.0 gal/min (7.6 l/min) maximum flow rate.
- Coordinates with Pinstripe faucets and accessories.
- Showerarm and flange not included.

Installation

- Wall-mount

Water Conservation & Rebates

- WaterSense-labeled 2.0-gpm showerheads use up to 20 percent less water than standard 2.5-gpm showerheads while still meeting strict performance guidelines.
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System™.

Recommended Accessories

16136



Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------




CP Polished Chrome



SN Vibrant® Polished Nickel



BN Vibrant® Brushed Nickel

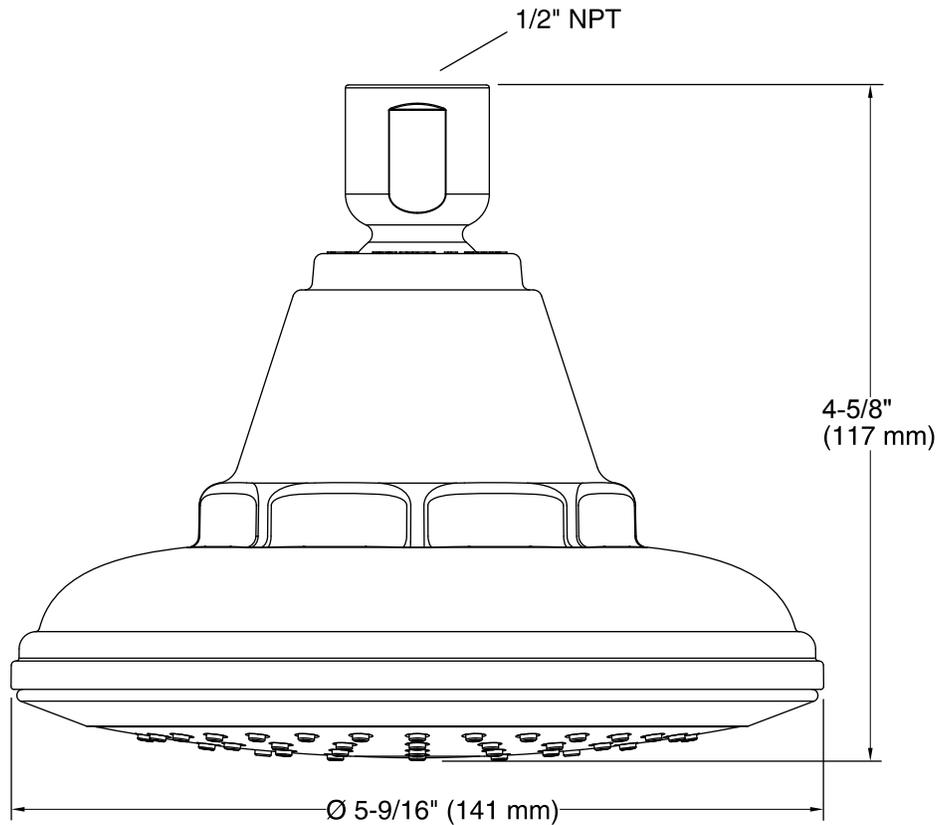

Technical Information

All product dimensions are nominal.

Showerhead:

Rated maximum flow: 2 gal/min (7.6 l/min)

Notes

Install this product according to the installation guide.