


# K-4920-T

ADA

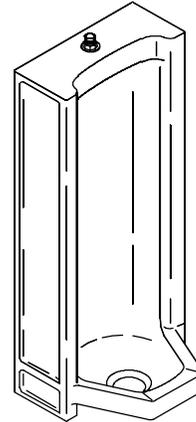

## FEATURES

- Vitreous china
- Washout stall
- 3/4" top spud
- 1.0 gallon (3.78L) flush
- ADA compliant

## CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ADA
- ASME/ANSI A112.19.2M
- ASME/ANSI A112.19.6M
- CABO/ANSI A117.1
- Energy Policy Act of 1992 (EPACT)
- IAPMO/UPC
- CSA B45
- States of New York, & Texas
- City of Los Angeles, CA

## COLORS/FINISHES

- 0 White
- Other Refer to Price Book for additional colors

### Accessories:

- 0 White
- G Brushed Chrome
- NA None Applicable

## SPECIFIED MODEL:

Model	Description	Colors/Finishes
K-4920-T	3/4" top spud stall urinal	<input type="checkbox"/> 0 White <input type="checkbox"/> Other _____

Recommended Accessories		
K-9172	Strainer with china grate	<input type="checkbox"/> NA
K-9183	Strainer with stainless steel beehive grate	<input type="checkbox"/> NA

Optional Accessories		
K-4931	Seam cover (for urinal set on 21" (53.3cm) centers)	<input type="checkbox"/> 0 White
K-4932	Seam cover (for urinal set on 24" (61cm) centers)	<input type="checkbox"/> 0 White
K-13686	Touchless battery-powered urinal flush valve, fixture mounted	<input type="checkbox"/> G

## PRODUCT SPECIFICATION:


The washout stall urinal shall be made of vitreous china with a 3/4" top spud. Urinal shall be 1.0 gallon (3.78L) flush. Urinal shall be ADA compliant. Urinal shall be Kohler Model K-4920-T-\_\_\_\_\_.

## PRODUCT INFORMATION

ADA compliant.	
Fixture:	
Configuration	Top spud
Water per flush	1 gallon* (3.78L)
Spud inlet size	3/4"
* Designed to flush with one gallon (3.78L) of water when installed with a water saving flush valve.	
Included Components:	
Spud	18774
Flush valve requirements: Refer to manufacturer's instructions and local codes.	

## INSTALLATION NOTES

Install this product according to the installation guide.  
For proper drainage, install lip of urinal below floor level.

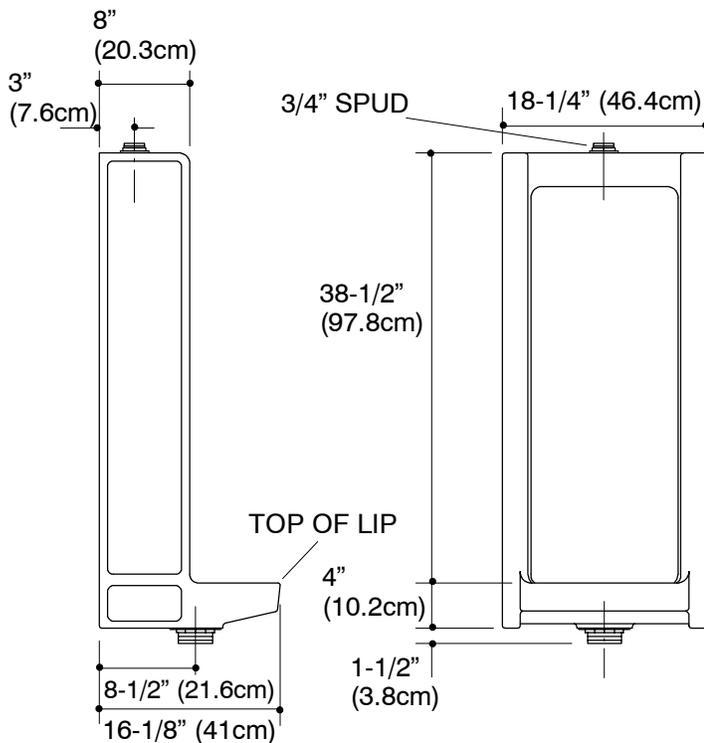

## PRODUCT DIAGRAM