

Memoirs®

Comfort Height® Toilet K-3812

Features

- Vitreous china.
- Elongated bowl.
- AquaPiston® flushing system.
- One-piece.
- Includes seat and cover.
- Includes trip lever.
- Less supply.
- 1.28 gpf (4.8 lpf).
- 12" (305 mm) rough-in.
- 2-1/8" (54 mm) glazed trapway.
- 11" (279 mm) x 8-3/4" (222 mm) water area.
- 28-1/8" (714 mm) x 17-3/4" (451 mm) x 28-5/8" (727 mm).

Optional Accessories

K-4650 Toilet Seat

K-9167-L Trip Lever

K-1954 Touchless Toilet Flush Kit

K-4008 Toilet Seat

K-4636 Toilet Seat

K-4652 Toilet Seat

K-4659 Toilet Seat

K-4684 Toilet Seat

K-4688 Toilet Seat

K-4694 Toilet Seat

K-4713 Toilet Seat

K-4732 Toilet Seat

K-4732 Toilet Seat

K-4748 Toilet Seat

K-4774 Toilet Seat

4790

K-4814 Toilet Seat

K-4888 Elongated Toilet Seat

K-5588 Elongated Toilet Seat

K-5638 Elongated Toilet Seat

K-7637 Angle Supply with Stop (single)

K-4701-AF Toilet Seat

K-4701-BN Toilet Seat

K-4701-CP Toilet Seat

K-4701-SN Toilet Seat

K-4712-T Toilet Seat

K-4761-BN Toilet Seat

K-4761-CP Toilet Seat

Components

Product includes:

K-4733 Toilet Seat

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

ADA

OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
166	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
71.3	7	Black Black™








Memoirs®

Comfort Height® Toilet K-3812

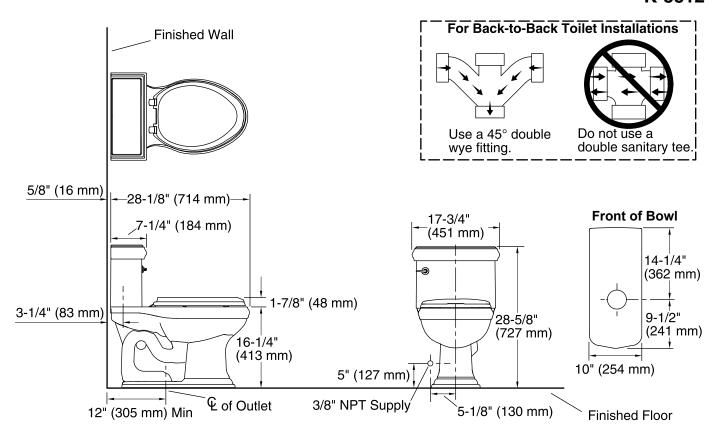

Technical Information

All product dimensions are nominal.

Toilet type: One-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Flush type: AquaPiston

Seat hinge type: Quiet-Close™, Quick-Release™

Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 11" x 8-3/4" (279 mm x 222 mm)

Rim to water surface: 6" (152 mm)

Rough-in: 12" (305 mm)

Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing Codes require elongated toilets and elongated, open-front toilet seats in public bathrooms.

Accessibility standards require controls to be located on the open side of the toilet.

