


### Features

- KOHLER cast iron
- Under-mount
- Single bowl
- 2-hole (oversize)
- 15-3/4" (400 mm) x 17-3/8" (441 mm)

### UNDER-MOUNT BAR SINK K-5848-2U

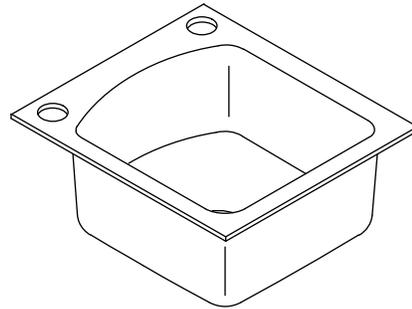

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1/CSA B45.2

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-5848-2U	2-hole (oversized) sink	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Optional Accessories</b>			
K-3294	Hardwood cutting board	<input type="checkbox"/> NA	
K-6009	Wire rack	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

### Product Specification

The under-mount bar sink shall be made of cast iron. Sink shall be single bowl. Sink shall be 2-hole (oversized). Sink shall be 15-3/4" (400 mm) in length and 17-3/8" (441 mm) in width. Sink shall be Kohler Model K-5848-2U-\_\_\_\_\_.

# NAPA

## Technical Information



Fixture*:	
Bowl area	16" (406 mm) x 17" (432 mm)
Water depth	9" (229 mm)
Drain hole	Ø 3-7/8" (98 mm)
Faucet holes	Ø 2-3/8" (60 mm)
* Approximate measurements for comparison only.	
Included component:	
Cut-out template	114713-7

## Installation Notes


Install this product according to the installation guide.

Supplied basin clamp assemblies require 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

For multiple bowl under-mount installations, a minimum distance of 3-3/8" (86 mm) is required between bowls. Countertop supplier to determine required support.

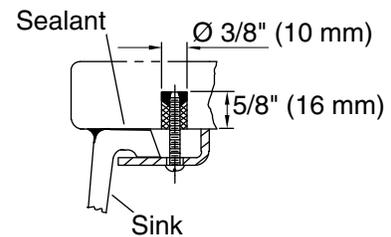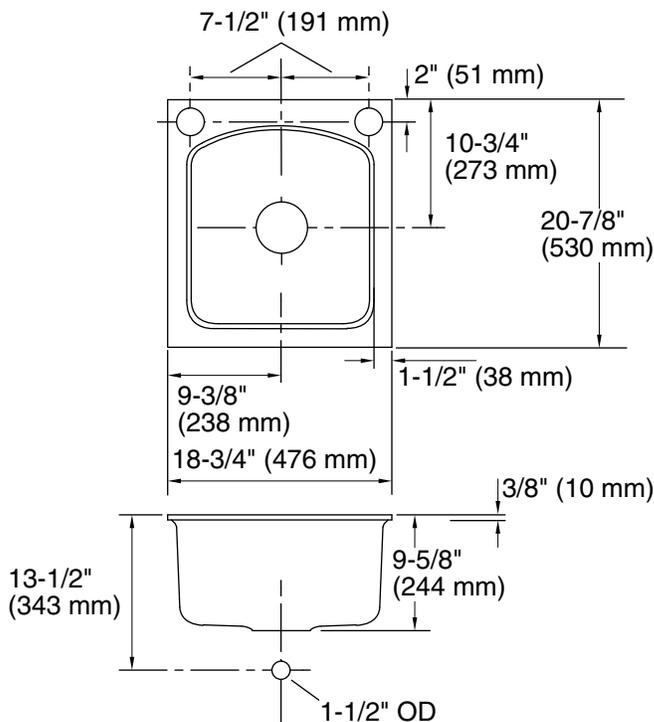

**Solid-Surface Installation**



## Product Diagram