

# **Purist®**

# Frameless Pivot Shower Door K-702012-L

### **Features**

- Frameless design highlights showering area.
- No top header eliminates clearance issues.
- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass.
- 3/8" (10 mm) tempered glass sidelite.
- Solid brass inside and outside rectangular handles complete the look of this door.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Coordinates with Purist® Suite.

### Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

## Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

# Components

Additional included component/s: Hardware kit.



# Codes/Standards

CPSC 16CFR 1201 ANSI Z97.1 (Tempered Glass)

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

# Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description   |
|-------|------|---------------|
|       | SH   | Bright Silver |
|       | RN   |               |


# Available Glass Options Code Description

Crystal Clear





# Purist® Frameless Pivot Shower Door K-702012-L

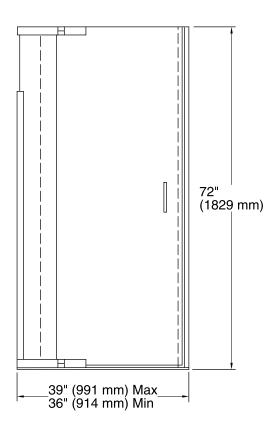

# **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Pivot


Opening Width - Min: 36" (914 mm)

Opening Width - Max: 39" (991 mm)

Walk-through - Min: 26-5/16" (668 mm)

Walk-through - Max: 29-15/16" (760 mm)

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®



## \* Walk-Through

**Note:** A minimum of 1-1/2" (38 mm) open area above the height of the door, 72" (1829 mm), is required for side panel and door installation.

#### **Notes**

Measure your actual product for roughing-in details.

The vertical opening should be a minimum of 73-1/2" (1867 mm) to allow for installation clearance.

