

KOHLER, Faucets

HiRise™

Wall-mount Bridge Kitchen Sink Faucet K-7338-4

Features

- Two guarter-turn washerless ceramic disc valves.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- High-arch gooseneck swing spout and 360-degree spout rotation offer superior clearance for filling pots and cleaning.
- 10-1/4" (260 mm) gooseneck swing spout reach.
- Two lever handles offer separate control of hot and cold water.
- Coordinates with other products in the HiRise collection.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]

Material

- Stainless-steel construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

Wall-mount for 8" (203 mm) centers.



ADA CSA B651

Codes/Standards

CSA B651

ASME A112.18.1/CSA B125.1 NSF 61 NSF 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	S	Polished Stainless
	BS	Brushed Stainless





HiRise™ Wall-mount Bridge Kitchen Sink Faucet K-7338-4

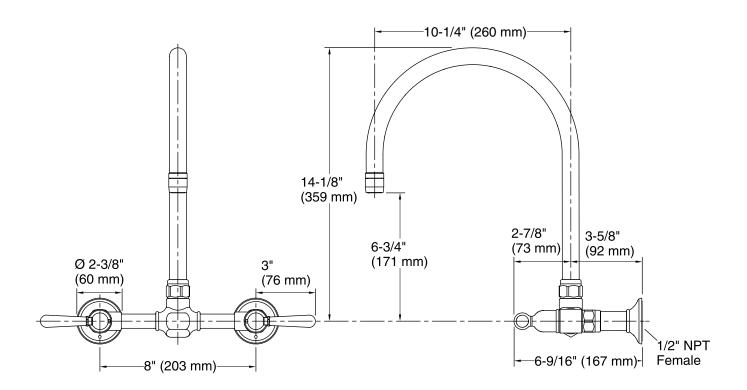

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)
Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

