

#### **Features**

- Brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- 2.2 gpm (8.3 lpm) flow rate
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Variety of handle style options
- Available with or without handspray
- For 8" (20.3 cm) centers
- 8-1/8" (20.6 cm) swing spout

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC

**Specified Model** 

- Energy Policy Act of 1992 (EPACT)
- NSF 61

# 

## **Colors/Finishes**

CP: Polished Chrome

Model	Description			Colors/Finishes	
K-7765-K	Kitchen sink faucet with handspray			CP	
K-7761-K	Kitchen sink faucet without handspray			□ CP	
Required Accessories (Includes Two Handles)			ADA	ADA	ADA
K-16012-2	Standard handles	□ CP		·	
K-16012-3	Cross handles		CP		
K-16012-4	Lever handles			CP	
K-16012-5	Wristblade lever handles				□ CP

#### **Product Specification**

Two-handle kitchen sink base faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Faucet shall be rated at 2.2 gallons (8.3 L) per minute. Faucet shall have lower flow aerator options. Faucet shall include 8" (20.3 cm) centers and an 8-1/8" (20.6 cm) swing spout. Faucet shall be available with a variety of handle style options and an optional white handspray. Faucet shall be Kohler Model K-\_\_\_\_\_-CP.




ð

## **TRITON**<sub>®</sub>

# **TRITON**<sub>®</sub>

#### **Installation Notes**

Install this product according to the installation guide.

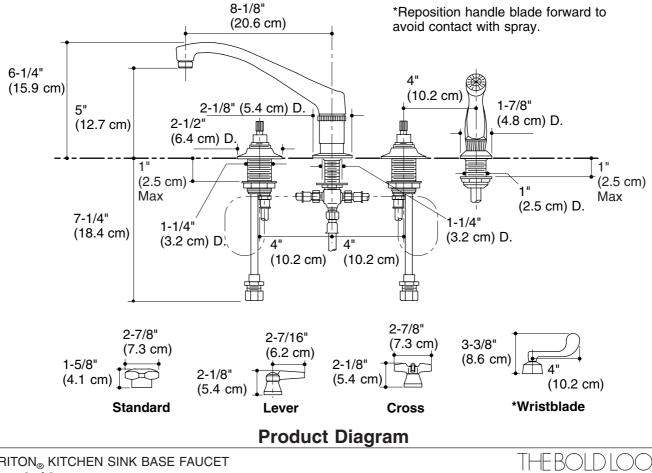

TRITON<sub>®</sub> KITCHEN SINK BASE FAUCET Page 2 of 2 111056-4-**ED** 

