

Pull-Down Kitchen Sink Faucet K-780

Features

- Three-function pull-down sprayhead with touch control allows you to switch from stream to Sweep[®] spray to pause.
- Sweep[®] spray creates a wide, forceful blade of water for superior cleaning.
- DockNetik[®], a magnetic docking system located within the spout, smoothly glides and securely locks the sprayhead into place.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion[®] technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- High-arch spout offers superior clearance for filling pots and cleaning.
- Single handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.8 gpm (gallons per minute) maximum flow rate at 60 psi.
- Meets CalGreen requirements for kitchen faucets.

Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- For single-hole or three-hole installation (escutcheon plate included)
- Flexible supply lines simplify installation.

Adapters, Rough-in and Extension Kits 1012715

Optional Accessories

1167289 1.5 GPM [5.7 l/min] Low Flow Kit 1167290 2.2 GPM (8.3 l/min) Low Flow Kit



ADA

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF 61 NSF 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless
Ē	2BZ	Oil-Rubbed Bronze



KOHLER. Faucets

Cruette® Pull-Down Kitchen Sink Faucet K-780

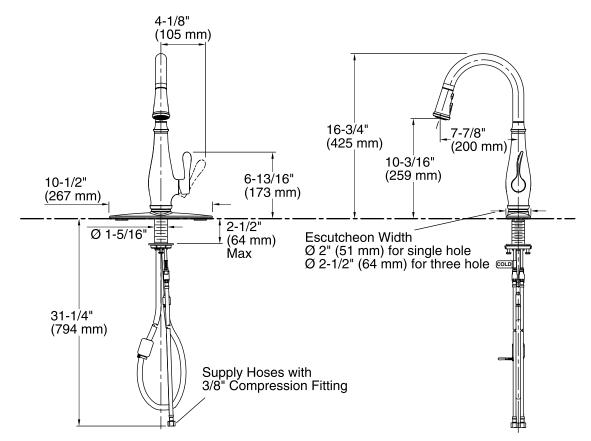

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: Pressure: 1.8 gal/min (6.8 l/min) 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

