



# Langlade®

## Undermount Smart Divide® double-equal kitchen sink

### K-6626-6U

#### Features

- 36" minimum base cabinet width.
- Double-equal bowls.
- 9" (229 mm) depth provides generous workspace.
- Six oversized faucet holes.
- Oversized holes allow for easy installation of faucets and accessories.
- Smart Divide® feature offers a lower bowl divider that increases workspace versatility.

#### Material

- KOHLER® enameled cast iron.

#### Installation

- Undermount.
- Undermount installation kit not included.

#### Recommended Products/Accessories

K-5180 Right-bowl sink rack  
K-5182 Left-bowl sink rack  
K-8801 Sink drain and strainer with tailpiece  
K-8799 Sink drain and strainer basket  
K-11352 Disposal Flange with Stopper  
K-9000 P-Trap  
1411886 Undermount sink kit 23"  
K-23726 Drain treatment  
K-23725 Cast iron cleaner

#### Included Components

Additional Components:  
Cut-out template



#### Codes/Standards












ASME A112.19.1/CSA B45.2


#### KOHLER® Enameled Cast Iron Kitchen Sink Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	FP	Caviar
	7	Black Black™

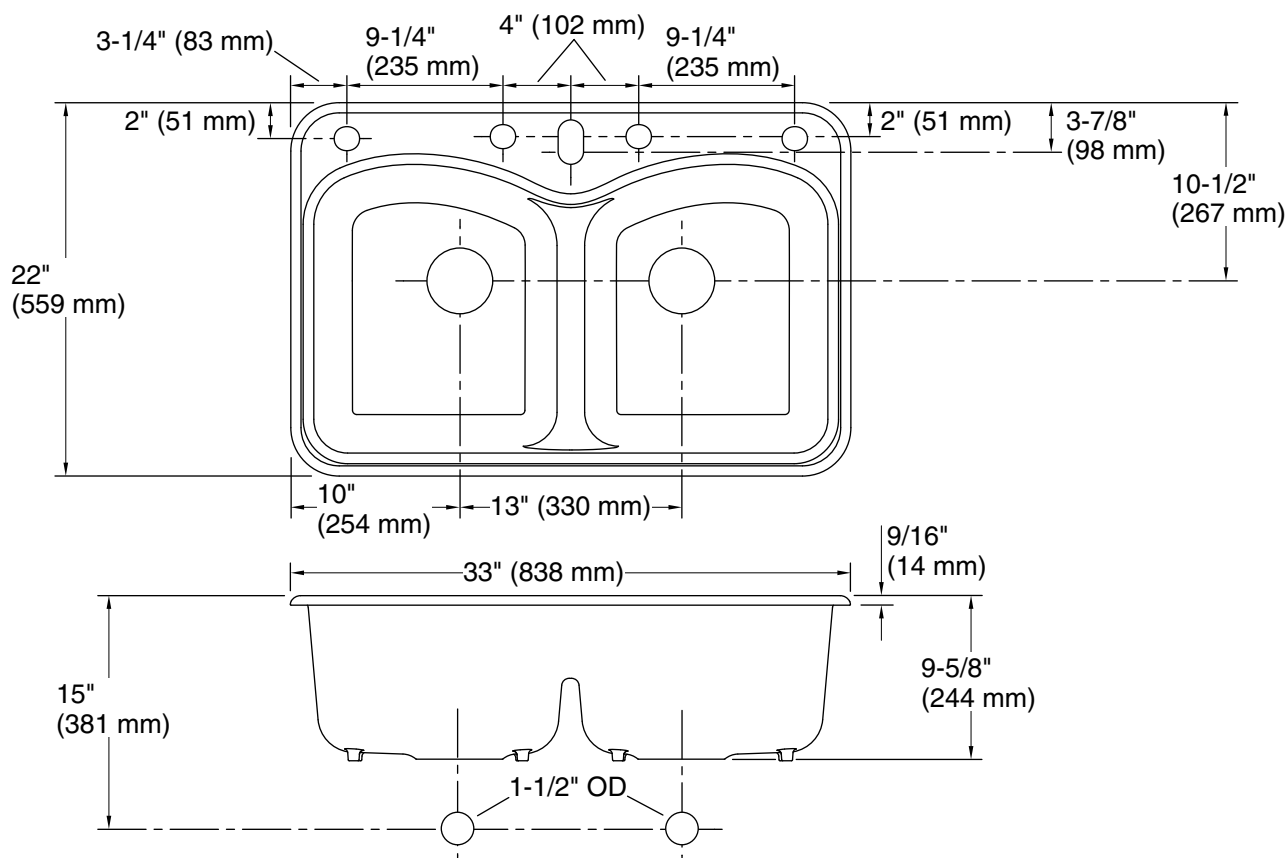

## Technical Information

All product dimensions are nominal.

Bowl configuration: Double equal

Installation: Undermount

Min. base cabinet width: 36" (914 mm)

Bowl area (Left): Length: 15" (381 mm)  
Width: 18-3/8" (467 mm)  
Bowl depth: 9" (229 mm)

Bowl area (Right): Length: 15" (381 mm)  
Width: 18-3/8" (467 mm)  
Bowl depth: 9" (229 mm)

Number of deck holes: 6

Faucet hole(s): 2-3/8" (60 mm)

Drain hole: 3-5/8" (92 mm)

Template: 1043754-7, required, included

## Notes

Install this product according to the installation instructions.