

Features

- Metal construction
- Intended for use with Rite-Temp or HiFlow Rite-Temp valves
- Variety of handle style options
- Includes faceplate and handle
- Available with 5-1/4" (13.3 cm) diverter bath spout with NPT or slip-fit connection

PRESSURE-BALANCING BATH AND SHOWER VALVE TRIM

K-T10274
ALSO K-T10275

ADA



Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- IAPMO/UPC
- CSA B125
- ADA

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Valve Trim Description	 ADA		 ADA		 ADA	
		<input type="checkbox"/> CP	<input type="checkbox"/> Other ____	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____
K-T10274-4	Bath/shower trim*, sculpted lever handle, NPT spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____				
K-T10274-4A	Bath/shower trim*, traditional lever handle, NPT spout			<input type="checkbox"/> CP	<input type="checkbox"/> Other ____		
K-T10275-4	Bath/shower trim*, sculpted lever handle, slip-fit spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other ____				
K-T10275-4A	Bath/shower trim*, traditional lever handle, slip-fit spout			<input type="checkbox"/> CP	<input type="checkbox"/> Other ____		
K-T10275-4G	Bath/shower trim*, script lever handle, slip-fit spout					<input type="checkbox"/> CP	<input type="checkbox"/> Other ____



*Rite-Temp valve must be ordered to complete faucet.

Product Specification

Rite-Temp pressure-balancing single-control bath and shower faucet trim shall be of metal construction. Bath and shower trim shall include showerhead with arm and flange, 5-1/4" (13.3 cm) diverter spout with NPT or slip-fit connection, and faceplate with handle. Faucet trim shall be K-T_____-_____-_____- and Rite-Temp valve shall be K-304-_____-NA OR K-306-KS-NA HiFlow Rite-Temp valve.

FORTÉ® RITE-TEMP™

Technical Information

Required Accessory					
K-304-K	Rite-Temp valve without stops, NPT connections	<input type="checkbox"/> NA			
K-304-KS	Rite-Temp valve with stops, NPT connections		<input type="checkbox"/> NA		
K-306-KS	HiFlow Rite-Temp valve with stops, NPT conn.			<input type="checkbox"/> NA	
K-304-KP	Rite-Temp valve with PVC connections				<input type="checkbox"/> NA

Optional Accessory:	
HiFlow Rite-Temp thin wall installation kit*	88526
* Required when using the K-306-KS valve in a fiberglass or acrylic installation.	

Install this product according to the installation guide.

Install the Rite-Temp valve according to the valve installation guide.

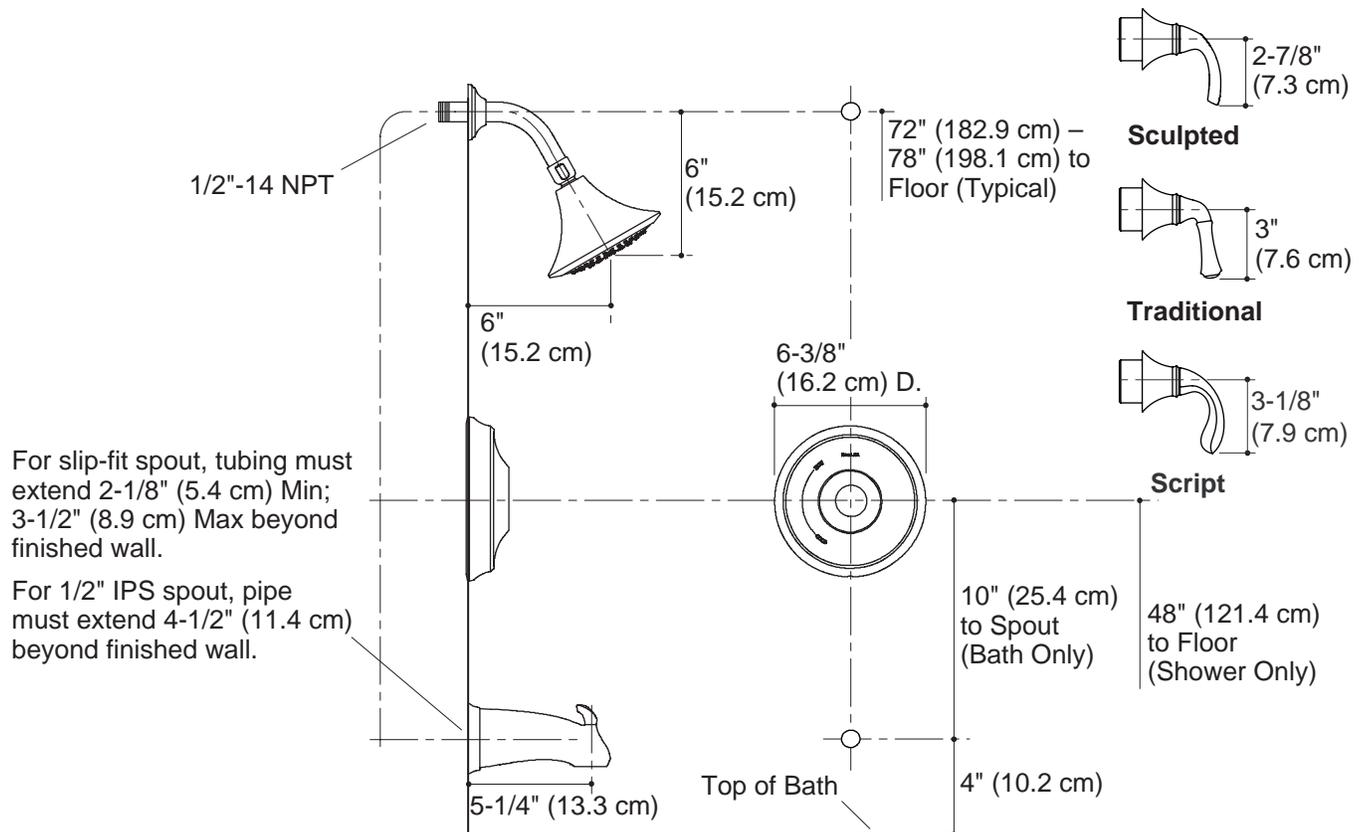
Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mounted spout, diverter, or handshower is connected to the spout outlet.

Install straight pipe or tube drop of 7" (17.8 cm) to 18" (45.7 cm) with single elbow between valve and wall-mount spout.

Installation Notes

WARNING: Risk of damage to the K-306-KS valve assembly. When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).



Product Diagram