

FEATURES

- Metal construction
- Available with 4-7/8" (12.4cm) diverter bath spout with N.P.T. or slip-fit connection
- Lever handle

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ASME/ANSI A112.18.1M
- CSA International B125
- IAPMO/UPC listed



BATH AND SHOWER FAUCET TRIM







COLORS/FINISHES

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Faucets Price Book for additional finishes

SPECIFIED MODEL: For complete faucet, both faucet trim and mixing valve must be specified.

Model	Description					
K-T15601-4	With Lever Handle and N.P.T. Spout					
K-T15601-4	S With Lever Handle and Slip-Fit Spout	□CP		□PB	□Other	
Required Accessory						
K-304-K	Rite-Temp Valve Without Stops		INA			
K-304-KS	Rite-Temp Valve With Stops		□NA		١	
K-306-KS	HiFlow Rite-Temp Valve With Integral Stops					□NA
K-308-K	Non-Pressure Balancing Valve Without Stops		INA			
K-308-KS	Non-Pressure Balancing Valve With Stops				۱	

PRODUCT SPECIFICATION:


Single-control bath and shower faucet trim shall be of metal construction. Product shall include showerhead with arm and flange, faceplate with lever handle, and 4-7/8" (12.4cm) diverter bath spout with N.P.T. or slip-fit connection. Faucet trim shall be Kohler Model K-T15601-_____ and mixing valve shall be Kohler Model K-_____-___NA.

INSTALLATION NOTES

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (17.8cm) to 18" (45.7cm) with single elbow between valve and wall-mount spout.

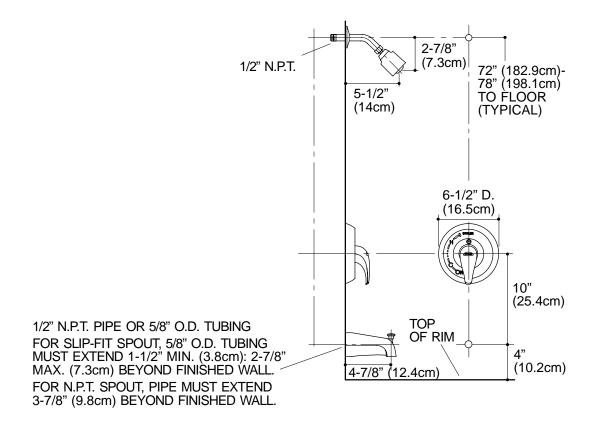

332

PRODUCT DIAGRAM

