

FINIAL TRADITIONAL


SHOWER FAUCET TRIM

K-T313

ALSO K-T309, K-304, K-306-KS

FEATURES

- Brass construction
- Traditional handle
- Available with contrasting or matching finish faceplate and handle accents
- Intended for use with Rite-Temp or HiFlow Rite-Temp valves



CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:



- ASME/ANSI A112.18.1M
- ASSE/ANSI 1016
- CSA B125
- IAPMO/UPC

COLORS/FINISHES

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Faucets Price Book for additional finishes

SPECIFIED MODEL: For 2.3 complete faucet, both faucet trim and Rite-Temp valve must be specified.

Model	Description			
K-T313-4F	Shower Only Trim With Biscuit Accents	<input type="checkbox"/> CP	<input type="checkbox"/> PB	
K-T313-4M	Shower Only Trim With Polished Finish Accents	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-T313-4P	Shower Only Trim With White Accents	<input type="checkbox"/> CP	<input type="checkbox"/> PB	
K-T309-4F	Valve Only Trim With Biscuit Accents	<input type="checkbox"/> CP	<input type="checkbox"/> PB	
K-T309-4M	Valve Only Trim With Polished Finish Accents	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-T309-4P	Valve Only Trim With White Accents	<input type="checkbox"/> CP	<input type="checkbox"/> PB	

Required Accessory				
K-304-K	Rite-Temp Valve Without Stops	<input type="checkbox"/> NA		
K-304-KS	Rite-Temp Valve With Stops		<input type="checkbox"/> NA	
K-306-KS	HiFlow Rite-Temp Valve With Integral Stops			<input type="checkbox"/> NA

Optional Accessory				
88526	Hi Flow Rite-Temp Thin Wall Installation Kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

PRODUCT SPECIFICATION:

Rite-Temp pressure-balancing single-control shower faucet trim shall be of brass construction. Shower only trim shall include showerhead with arm, and faceplate with traditional handle. Valve only trim shall include faceplate with traditional handle. Faucet trim shall be Kohler Model K-T _____ - _____ - _____ and Rite-Temp valve shall be K-304- _____ -NA **OR** K-306-KS-NA HiFlow Rite-Temp valve.

FINIAL TRADITIONAL

PRODUCT INFORMATION



WARNING: Risk of damage to the K-306-KS valve assembly. When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).


INSTALLATION NOTES

Install this product according to the installation guide.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (17.8cm) to 18" (45.7cm) with single elbow between valve and wall-mount spout.

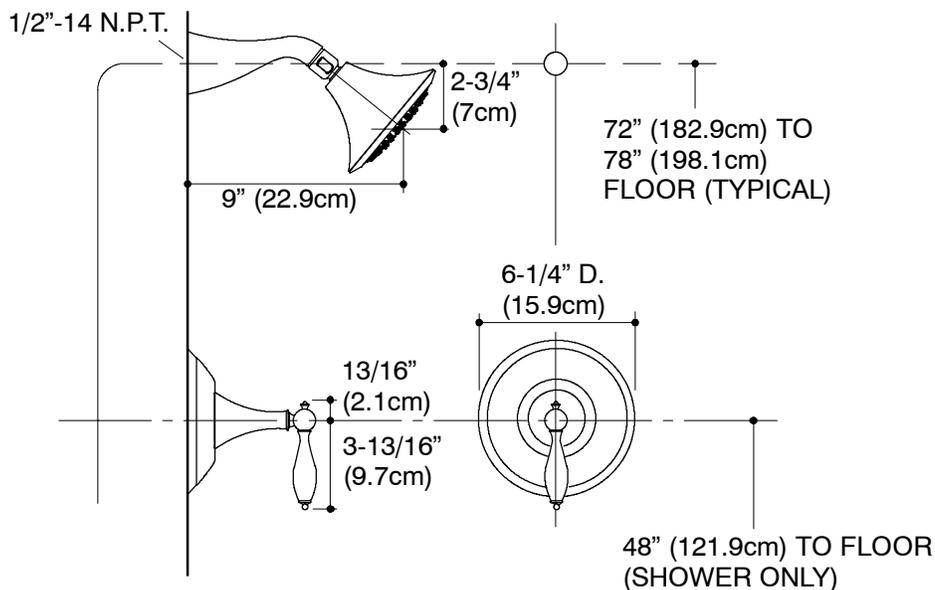

PRODUCT DIAGRAM