


### Features

- Acrylic
- Integral high-dome ceiling
- Grab bar and shelf
- Integral soap ledges
- Left or right drain
- 60" (152.4 cm) x 34-13/16" (88.4 cm) x 90" (228.6 cm)

### 60" BATH AND SHOWER MODULE K-1681, K1682

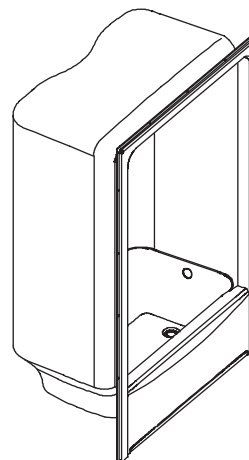

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO/UPC
- CSA B45
- Underwriters Laboratories (UL)
- ANSI Z124.1

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1681	Bath and shower module with drain at left	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1682	Bath and shower module with drain at right (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories			
K-9459	Sonata accessory kit	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Optional Accessories (continued on page 2)			
K-7166-AF	Drain (recommended)	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
K-9529	Removable Sonata bath whirlpool seat (recommended)	<input type="checkbox"/> 0	
K-1657, K-1663	Steam generator and control kit	<input type="checkbox"/> NA	
K-1708, K-1647-PC	Power Clean™ steam generator and control kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____
K-1665	Dome light	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### Product Specification:

The acrylic bath and shower module shall be 60" (152.4 cm) in length, 34-13/16" (88.4 cm) in width, and 90" (228.6 cm) in height. Bath and shower module shall be available with left or right drain. Shower module shall have integral high-dome ceiling, integral soap ledges, grab bar, and shelf. Shower module shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_.

# SONATA®

Optional Accessories			
K-704314	Senza® steam bypass bath door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH <input type="checkbox"/> Other_____
K-704221	Senza® bypass bath door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH <input type="checkbox"/> Other_____
K-703023	Forum™ bypass bath door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH <input type="checkbox"/> Other_____
K-704121	Portico™ steam bypass door*	<input type="checkbox"/> SH	<input type="checkbox"/> BH <input type="checkbox"/> Other_____

\* Refer to the Fixtures Price Book for glass options.

## Technical Information

Fixture*:	basin area	top area
Bathing well	46" (116.8 cm) x 23" (58.4 cm)	54" (137.2 cm) x 27" (68.6 cm)
	water depth	capacity
To overflow	11-7/8" (30.2 cm)	55 gal (208.2 L)
Configuration	1-piece	
Drain	3-3/8" D. (8.6 cm)	
Weight	200 lbs (90.7 cm)	

\* Approximate measurements for comparison only

## Installation Notes


Install this product according to the installation guide.

Fixture not drilled for supply fittings.

**Shimming is required to level the fixture.**

Stud opening tolerance [+ 1/4" (6 mm) - 0" (0 mm)]. When a fire rated wall is specified, dimensions are to the inside of the wall board. Some shimming between the stud frame and the fixture may be required.

The K-1657/K-1663 or K-1708/K-1647-PC steam generator/control kit are designed for use with this product. Kohler shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.

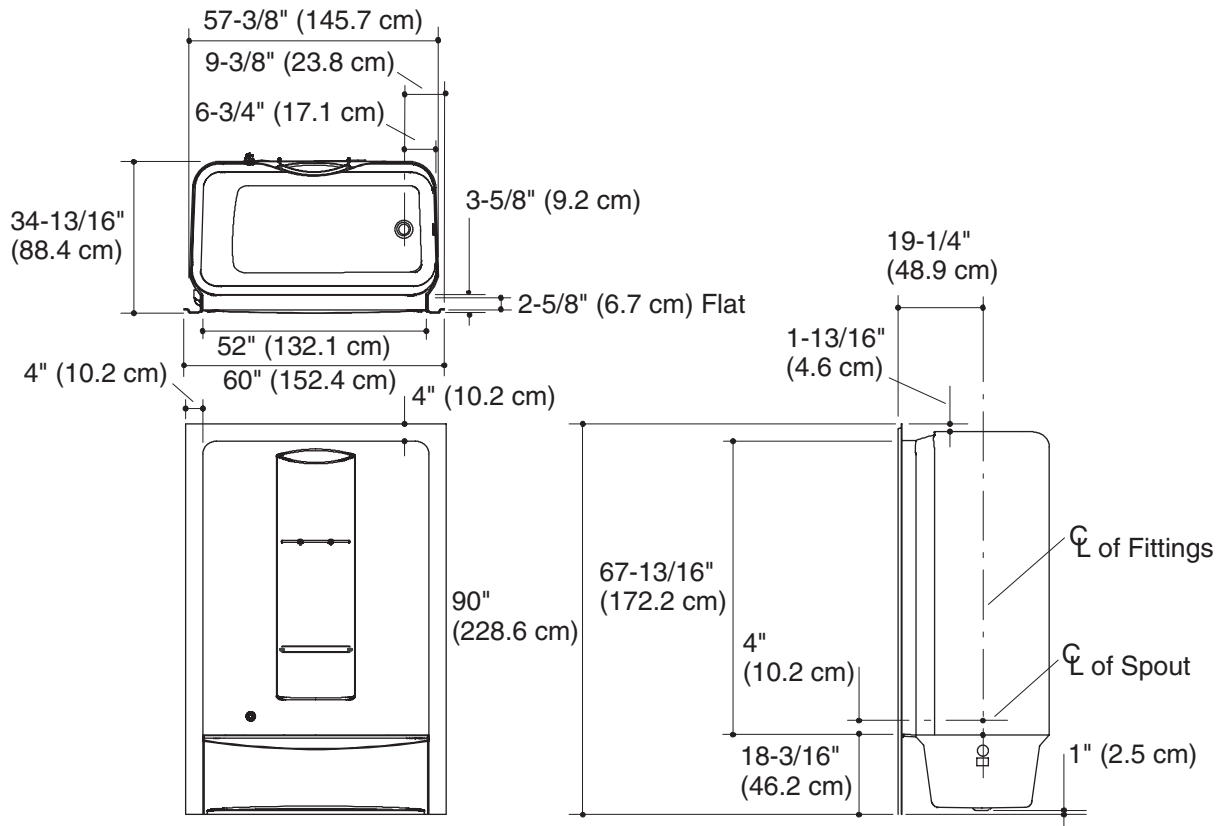

## Product Diagram