KOHLER_®

Features

- Integral flange.
- Left drain.
- Integral lumbar support.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- 60" (1524 mm) x 32" (813 mm) x 21-1/4" (540 mm)
- Textured bottom surface.
- Integral apron with removable access panel.
- Coordinates with other products in the Bancroft[®] collection.

Material

Acrylic

Installation

Alcove

Recommended Accessories

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7259 Clearflo Bath Drain K-11677 Bath Drain K-24916 Wireless Music Kit



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM A888 ASTM E662 UL 1795 Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Sandbar

Color Code Description

0	White
96	Biscuit
47	Almond
NY	Dune

G9




Bancroft® 5' Bath K-1150-LAW





Bancroft® 5' Bath K-1150-LAW

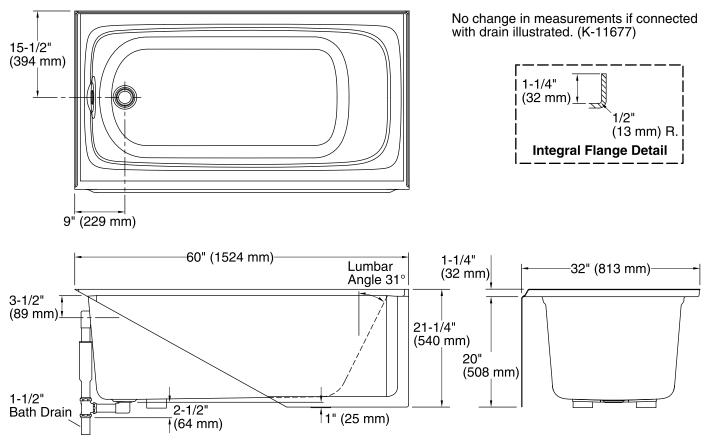

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD). Heated Surface: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.		
Installation:	3-Wall Alcove	
Drain location:	Left	
Basin area, bottom:	45" x 22" (1143 mm x 559 mm)	
Basin area, top:	54" x 25" (1372 mm x 635 mm)	
Weight:	80 lbs (36.3 kg)	
Minimum floor load:	40 lbs/ft² (195.3 kg/m²)	
Water depth:	15" (381 mm)	
Water capacity:	60 gal (227.1 L)	
Electrical component	Heated Surface: 120 V, 0.5 A, 60 Hz, 65	
rating:	W	
Minimum flat for door:	2" (51 mm)	

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

