



# Elevance® Rising Wall

## 5' BubbleMassage™ Bath

### K-1914-GLW



#### Features

- Integral flange.
- Left drain.
- Chair-height bathing seat makes bath easy to enter and exit.
- 14" soaking depth at seat area.
- Rising side wall is easy to lift, requiring less than 5 pounds of force.
- Door glides on a track system with a counterbalance system to make it lightweight.
- Inflatable seal.
- Bath fills within four minutes when using 3/4" supply valve and piping.
- Dual-drain system allows bath to empty in less than two minutes.
- Integrated ledge enables you to reach personal items with ease.
- Integral lumbar support.
- 60-1/4" (1530 mm) x 33-1/2" (851 mm) x 39-1/4" (997 mm)

#### Material

- Acrylic

#### Hydrotherapy

- 59 BubbleMassage™ airjets.
- Built-in 300 W heater.
- Keypad control.
- Automatic purge cycles remove residual water from air channels after use.

#### Installation

- Alcove

#### Required Accessories

K-1010 17" Curved Grab Bar  
K-7271 Brass Slotted Overflow Bath Drain

or

K-1010 17" Curved Grab Bar  
K-7272 PVC Slotted Overflow Bath Drain

#### Recommended Accessories

K-10257 Multifunction Handshower  
K-11891 12" Grab Bar  
K-2971-KS 3/4" Pressure-balancing Valve  
K-728-K 3/4" Two- or Three-Way Transfer Valve  
K-8820 Sink Drain and Strainer  
K-977 Handshower Holder with Hose




ADA

#### Codes/Standards


ASME A112.19.15  
ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
Greenguard UL 2818 - Gold  
ADA  
ICC/ANSI A117.1  
CARB P2

#### KOHLER® Elevance Rising Wall Bath - Limited Warranty

See website for detailed warranty information.

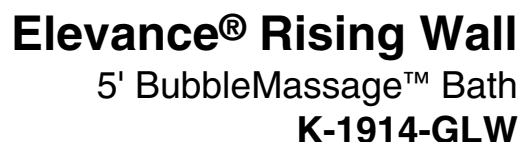

Three drain cutouts required.

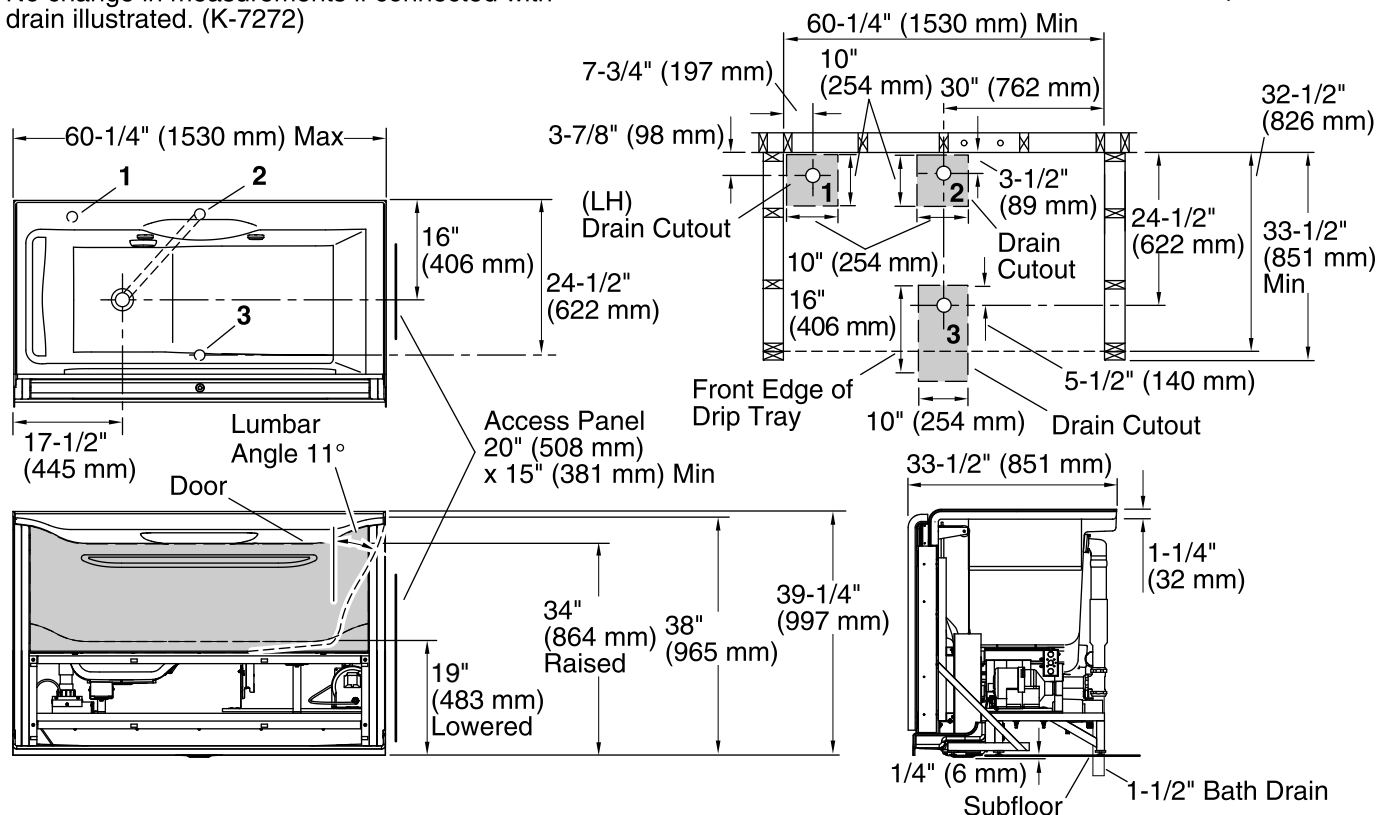

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

A 350 VA size or larger Uninterruptible Power Supply (UPS) is recommended for areas of routine or prolonged power outages.

**NOTE:** Three drains are required. Drains 1 and 2 require a 10" (254 mm) x 10" (254 mm) cutout. Drain 3 requires a 10" (254 mm) x 10" (254 mm) cutout if accessible from below. For above-floor access, make a 10" (254 mm) x 16" (406 mm) cutout. Support the finished floor accordingly.

Remote blower installation kit K-1446 is available for relocating the blower. Provide access for servicing the blower.

Weight: 286 lbs (129.7 kg)

Minimum floor load: 60 lbs/ft<sup>2</sup> (292.9 kg/m<sup>2</sup>)

Water depth: 19-3/4" (502 mm)

Water capacity: 72 gal (272.5 L)

Electrical component Bath Door: 120 V, 60 Hz, 120 W

rating: Blower: 120 V, 10.5 A, 60 Hz, 300 W