

# **Archer®**

5' Bath **K-1946** 



### **Features**

- Comfort Depth® design offers a convenient 19-inch step-over height while retaining the same depth as a standard 21-inch bath
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Textured bottom surface
- Reversible drain.
- Coordinates with other products in the Archer collection.

## Material

Acrylic

### Installation

Drop-in

# **Required Accessories**

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

## **Recommended Accessories**

K-24916 Wireless Music Kit



ADA

# Codes/Standards

CSA B45.5/IAPMO Z124 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

# **KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty**

See website for detailed warranty information.

# **Available Color/Finishes**

Color tiles intended for reference only.

| Color | Code | Description   |
|-------|------|---------------|
|       | 0    | White         |
|       | 96   | Biscuit       |
|       | 47   | Almond        |
|       | NY   | Dune          |
|       | 95   | Ice™ Grey     |
|       | G9   | Sandbar       |
|       | K4   | Cashmere      |
|       | 58   | Thunder™ Grey |
|       | 7    | Black Black™  |








# **Archer®**


5' Bath **K-1946** 

No change in measurements if connected with drain illustrated. (K-7272)



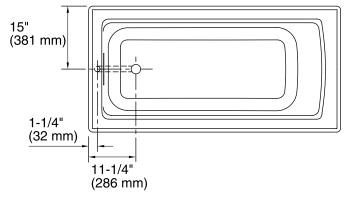

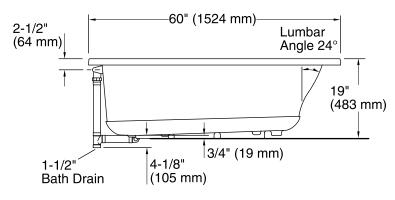



## **Technical Information**

All product dimensions are nominal.

Installation: Drop-in Drain location: End

Basin area, bottom: 45-1/8" x 19-11/16" (1146 mm x 500 mm) Basin area, top: 52-1/8" x 22-1/16" (1324 mm x 560 mm)

Weight: 58 lbs (26.3 kg)

Minimum floor load: 45 lbs/ft² (219.7 kg/m²)
Water depth: 15-1/8" (384 mm)
Water capacity: 57 gal (215.8 L)

Cutout: Drop-in, 58-1/2" x 28-1/2" (1486 mm x

724 mm)

Minimum flat for door: 2" (51 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

