

Product Information

Fixture: Approx. measurements for comparison only.				
Bathing well:				
Basin area, bottom	45-1/8" (1146 mm) x 19-11/16" (500 mm)			
Basin area, top	52-3/4" (1340 mm) x 25-5/16" (643 mm)			
Weight	86 lbs (39 kg)			
To overflow:				
Water depth	15" (381 mm)			
Capacity	58 gal (219.6 L)			
Drop-in cutout		58-1/2" (1486 mm) x 30-1/2" (775 mm)		
Amplifier/control:	15 W (per channel)	120 V	50/60 Hz	-
Heater:	65 W	120 V	60 Hz	1.1 A
Required accessories:				
Clearflo slotted overflow brass bath drain OR				K-7271
Clearflo slotted overflow bath drain – PVC pipe				K-7272

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD): 120 V, 15 A, 50/60 HZ

Installation Notes

Install this product according to the installation guide. Ensure that the interface, amplifier, and transducers are functional before completing the installation.


Control amplifier fits 16" (406 mm) center studs. 25' (7.6 m) cables are included.

Locate the bath within 24" (610 mm) of a GFCI-protected 120 V, 15 A grounded electrical outlet. A second grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier. One electrical service may be used for the entire bath and related electrical components.

Floor support under this product must provide for a minimum of 44 lbs/square foot (214.8 kg/square meter) loading.

Will comply with **ADA** when installed per Section 607 Bathtubs of the 2010 ADA Standards for Accessible Design.

Fixture conforms to CSA B45.5/IAPMO Z124. All dimensions are nominal.

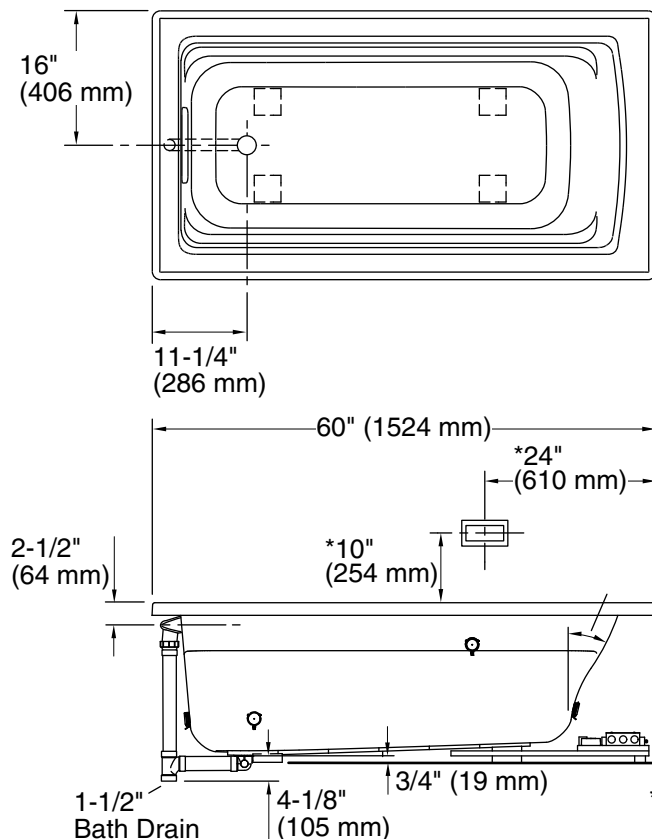

No change in measurements if connected with drain illustrated. (K-7272)

