



Features

- Catalyzed conversion varnish provides a durable moisture-resistant finish.
- Frameless construction with full-overlay doors and drawers.
- Two doors and one drawer.
- Three-way adjustable slow-close door hinges with 110-degree opening capability for easy cabinet access.
- Optional adjustable shelf / drawer organizer (sold separately).
- Coordinates with other products in the Poplin[™] collection.
- Toe kick covers blemished or inconsistent flooring.
- Full-extension 18" depth drawers with slow-close under-mount slides for smooth opening.
- Solid wood drawers with dovetail construction.
- Door and drawer pulls are sold separately.

Material

Solid wood and veneers.

Recommended Accessories

2796

2779

K- 5456 Bathroom Vanity Top

K- 5422 Bathroom Vanity Top

K- 5437 Bathroom Vanity Top

K- 99686 Knob

K- 99689 Handle

Optional Accessories

99680

99679

K- 99665 Framed Mirror

K- 99681 Side Mount Electrical Outlets

K- 99682 General Storage

K- 99683 Makeup Storage

K- 99684 Drawer Dividers

K- 99672 Two-Drawer Bridge

K- 99668 Lap Drawer

K- 99676 Filler Strip

K- 99001 Mirrored Cabinet

K- 99007 Mirrored Cabinet

K- 99009 Mirrored Cabinet

99662

99678



Codes/Standards

CARB P2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-----------------|
| | 1WA | Linen White |
| | 1WF | Khaki White Oak |
| | 1WD | Ramie Walnut |
| | 1WG | Cherry Tweed |
| | 1WB | Claret Suede |
| | 1WC | Felt Grey |
| | 1WE | Terry Walnut |
| | 1WU | Batiste Black |
| | 1WT | Mohair Grey |







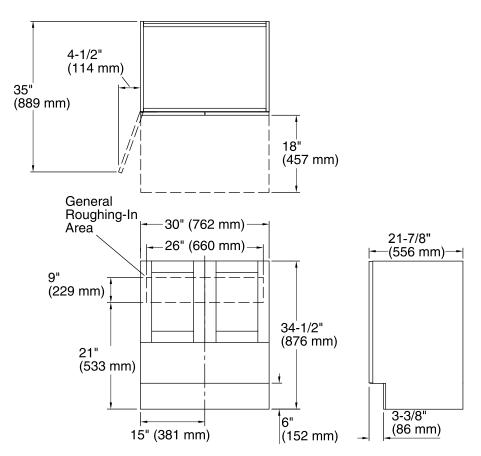

Technical Information

All product dimensions are nominal. Vanity type: Standard

Notes

Install this product according to the installation guide.

Decorative cabinet hardware is not supplied. Refer to the KOHLER bath accessories line for recommended cabinet hardware to complement your vanity.

Select the type of fastener based upon the wall material. Two 250 lb (113.4 kg) minimum load bearing fasteners are recommended.

