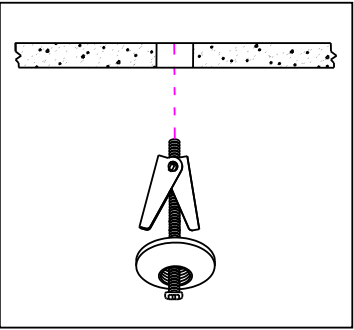

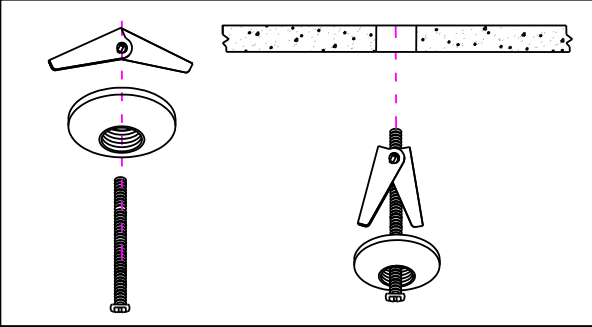
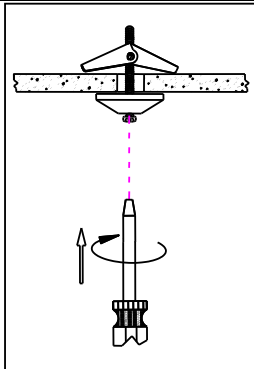
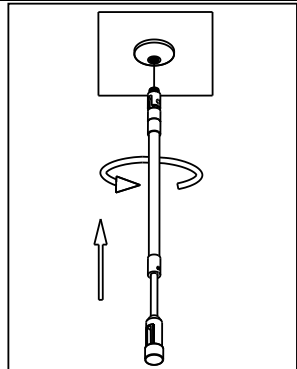
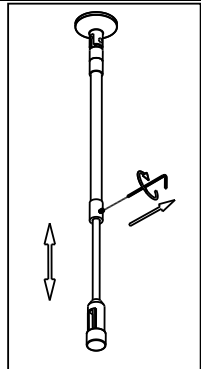


# Installing or adjusting Standoff GKST1004/GKST1006/GKST1012/GKST1024

The standoff uses the quick adapter to attach to the rail and adjust the standoff for you want

Follow the step-by-step instructions below.

		
<p>1. Mark location of standoffs on ceiling. Then drill hole for toggle bolt, if location is on ceiling joist drill pilot hole for wood screw.</p>	<p>2. Remove circular mounting piece from standoff.</p>	<p>3. Place screw through mounting piece.</p>
		
<p>4. Feed toggle into drilled hole and tighten.</p>	<p>5. Secure the standoff assembly to the threaded washer.</p>	<p>6. Use the Allen wrench provided to loosen the set screw (don't remove completely), and you can adjust the height that you want. Then tighten the set screw.</p>

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND**



LA-1236E