

KRAUS BRAND BATHROOM FAUCETS LIMITED LIFETIME WARRANTY

KRAUS is proud to offer its customers the strongest, most durable ceramic cartridges in all solid brass Bathroom Faucets it manufactures. KRAUS guarantees all products to be free of defect in materials and craftsmanship. All KRAUS BRAND Bathroom Faucets carry a limited lifetime warranty from the original date of purchase.

If a product fails due to defect in material or craftsmanship during the warranty period, KRAUS will repair or replace the items at its sole discretion. Warranty does not apply when the item has been tampered with, misused, improperly installed, altered, or damaged due to abuse or accident. Proof of purchase (original sales receipt) must be provided to KRAUS for all warranty claims. Please contact one of our representatives if you need any additional details.

All KRAUS products must be installed by a licensed professional plumber or contractor to avoid any improper use or installation.

IN NO EVENT SHALL KRAUS BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, INSTALLATION COST, LABOR, TRAVEL TIME, FREIGHT COSTS INCURRED, LOST PROFITS, OR CONTINGENT LIABILITIES.

KRAUS USA Inc. makes no representation that its products comply with any or all local building or plumbing codes. It is the consumer's responsibility to determine local code compliance.

This warranty extends to the original purchaser and first consumer.


Exquisite Collection Installation Manual

Wall-mounted single-lever bathroom faucet

Dear Valued Customer,


Kraus would like to take this opportunity to thank you for purchasing Kraus products. It is our sincere hope that you are completely satisfied with your new purchase. We welcome any questions or comments you may have, and look forward to assisting you in the future.

Sincerely, Kraus customer service department.



Before Your Installation

Check to make sure you have the following parts indicated below:



Model **KEF-14607**

Tools You Will Need





Adjustable wrench

Adjustable wrench





Phillips screwdriver

(supplied)


Spanner for body (supplied)


Contact Us Toll-Free at 1-800-775-0703; or visit our website at www.kraususa.com ©2008-2011 Kraus USA Inc.

Contact Us Toll-Free at 1-800-775-0703; or visit our website at www.kraususa.com@2008-2011 Kraus USA Inc.

Replacement Parts

Keep this manual for ordering replacement parts.

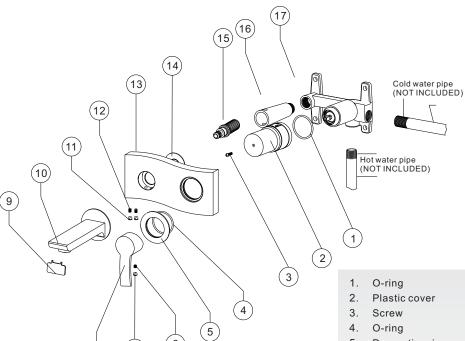



- 5. Decorative ring
- Set screw
- 7. Decorative cap
- 8. Handle
- 9. Spanner for spout
- 10. Spout
- 11. Decorative cap
- 12. Set screw
- 13. Decorative board
- 44 5: : . . .
- 14. Fixing board
- 15. Connecting pole
- 16. Plastic cover
- 17. Valve

Trouble - Shooting

PROBLEM CAUSE

Leaks underneath handle Adjusting ring or cap

Adjusting ring or cap has come loose.

Tighten the adjusting ring or cap.

ACTION

Aerator leaks or has an inconsistent water flow pattern.

Aerator is dirty or misfitted.

Unscrew the aerator to check rubber packing or replace the aerator.

Water will not shut off completely.


Dirty or worn out plastic washer in the cartridge.

Remove handle and cartridge to check if ceramic disk is damage permanently or dirty.


Re-install cartridge.

Contact Us Toll-Free at 1-800-775-0703; or visit our website at www.kraususa.com@2008-2011 Kraus USA Inc.


Installation




Place sufficient Teflon tape on hot/cold water supply pipe lines. Insert them into the corresponding threaded screw of valve 17 and install it into the wall. Open the water supply to check if there is leakage. Loosen screw 3 and take the plastic cover 2 off. Open the cartridge to make sure there is no leakage. Close the cartridge after checking. Remove plastic cover 16. Open cartridge and remove the dirt in the pipe. Close the cartridge and install the plastic cover 16 and 2 into valve.



Seal the wall after checking for leakage. If there is no leakage, remove plastic cover 16 and 2.



Place sufficient Teflon tape on connecting pole 15. Screw it into corresponding screwed hole of valve 17 (If the connecting pole is too long please shorten it with a saw; refer to dimensions for detail size). Install decorative board 13 and Fixing board 14 to valve.



Install connecting pole 15 to the spout 10. Screw the set screw 12 into spout 10 with alley key and install the decorative cap 11. Install handle 8 to the corresponding position to valve 17. Tighten decorative screw 6 with alley key and place cap 7 afterwards.

Contact Us Toll-Free at 1-800-775-0703; or visit our website at www.kraususa.com ©2008-2011 Kraus USA Inc.