



FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms and garages.

ATTRIBUTES

The High Output worklight's 6-1/2" white reflector directs bright light on work areas or to fill dark spaces where there is no natural light. Starts reliably down to 0° (-18° C). Fully assembled, ready-to-install. Comes with 5' power cord - no wiring required. Supplied with (2) "S" hooks and (2) 12" chains for no-hassle installation. Easy on/off power switch with 7-1/2" beaded chain. To extend the reach of the pull switch, a 24" pull string with decorative Lithonia logo finial is included.

Utilizes (2) 32W linear T8 fluorescent lamps (F32T8/735) for energy efficiency, superior color rendering and 10,000 hour average lamp life.

Standard with residential electronic ballast (120 volt, 60Hz). Instant on, ensures no flickering and quiet operation without interfering with other home electronics. Starts instantly down to 0°F (-18°C).

LISTING

CUL listed to US and Canadian safety standards and suitable for damp locations.

WARRANTY

Guaranteed for two years against mechanical defects in manufacture.


| | |
|----------------|------|
| Catalog Number | |
| Notes | Type |

Indoor General Purpose

Work Light

High Output Utility

Linear T8 Fluorescent

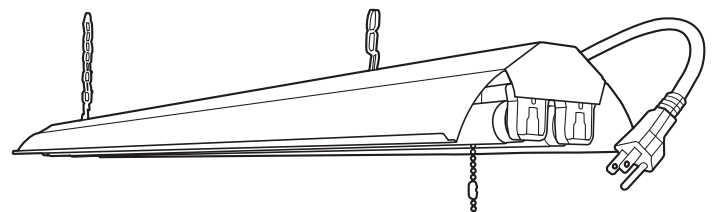


DIMENSIONS

| Nominal Size | Lamp Configuration | Model Number | Number of Lamps | (A) Width inches (cm) | (B) Length inches (cm) | (C) Height inches (cm) | (D) Extension* inches (cm) |
|--------------|--------------------|--------------|--------------------|-----------------------|------------------------|------------------------|----------------------------|
| 48" | | 1245 | (2) 32 W linear T8 | 6-1/2" (16.5) | 48" (122.0) | 2-3/8" (5.1) | 12" (30.5) |

* Extension from ceiling

All dimensions are in inches (centimeters)

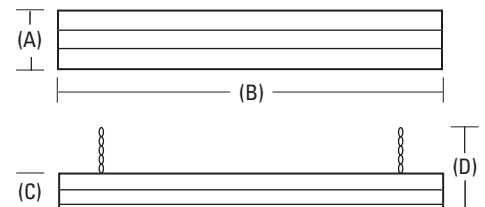

ORDERING INFORMATION

Example: 1245

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories and replacement parts as separate catalog numbers.

1245

| Model Number ^{1,2,3,4} |
|---------------------------------|
|---------------------------------|

1245 (2) 32W linear T8 fluorescent lamps **required**

| Ballast/Voltage |
|-----------------|
|-----------------|

(blank) 120 volt residential electronic ballast (standard)
Other voltage and ballast types (Consult factory)

| Options |
|---------|
|---------|

(Consult factory)

Notes:

- Lamps not included.**
- Use with non-dimmable switches only.
- Not designed to be mounted flush to the ceiling.
- Must be plugged into three pronged outlets to avoid electrical shock and to ensure reliable starting.

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.