

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in common areas, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

### CONSTRUCTION

The Aberdale Collection features a white acrylic diffuser with a cleanable linen fabric overlay for an updated traditional look.

### OPTICS

The sconce produces up to 492 lumens and the flush mount produces up to 1,658 lumens at 50,000 hours (determined by fabric and color temp - see chart below).

### ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 24/9 watts (flush mount/sconce), 64 lumens per watt (flush mount).

Works with most standard incandescent dimmers (see list of approved dimmers).

### INSTALLATION

All mounting hardware included for mounting to a standard junction box.

### LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations. ENERGY STAR® certified. The FMABSL Sconce is ADA compliant.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.

Decorative Indoor

# Aberdale Collection LED Flush Mount and Sconce



ADA



Brown






Tan



Lilac



Lumen Data				
		Brown (F20)	Tan (F21)	Lilac (F22)
Sconce/Flush Mount	3000K	267/1425	406/1658	290/1496
	4000K	290/1506	492/1609	330/1524

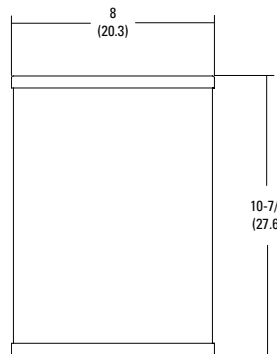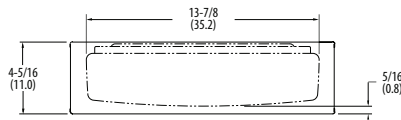

### Specifications

Flush mount	Sconce
Depth: 4-5/16 (11.0)	Depth: 3-7/8 (9.9)
Diameter: 15-3/4 (40.0)	Width: 8 (20.3)
Weight: 3.25 lb (1.5 kg)	Length: 10-7/8 (27.6)
	Weight: 1.92 lbs (0.9 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example:** FMABFL 16 20830 F21

Series	Module/CRI	Color temperature	Finish
<b>FMABFL 16</b> LED flush mount, 16" diameter	<b>208</b> >80	<b>40</b> 4000 K 35 3500 K <sup>1</sup>	<b>F20</b> Brown <b>F21</b> Tan
<b>FMABSL 11</b> LED wall sconce, 11" tall	<b>78</b> >80	<b>30</b> 3000 K <b>27</b> 2700 K <sup>1</sup>	<b>F22</b> Lilac


### Notes

<sup>1</sup> Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.


# LED Flush Mount Aberdale Collection

## PHOTOMETRICS


**FMABFL 20830 F20**, 1,497 delivered lumens, test no. LTL25731, tested in accordance to IESNA LM-79.

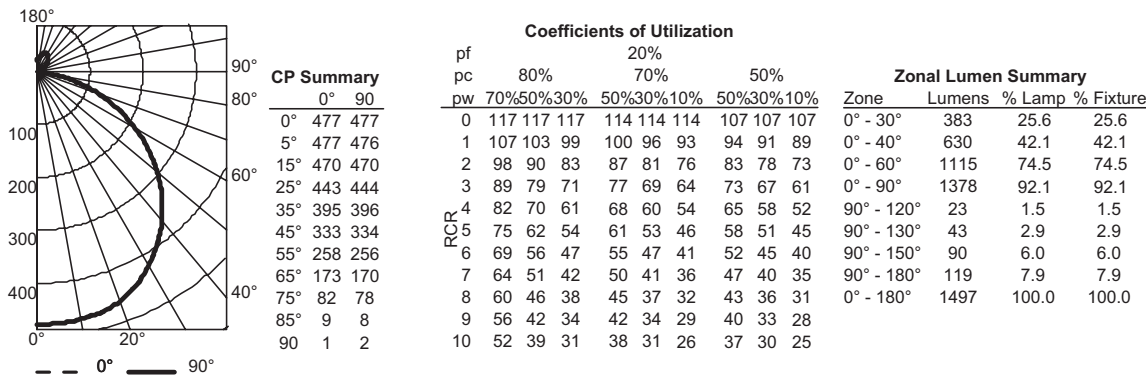

**FMABFL 20830 F21**, 1,637 delivered lumens, test no. LTL25729, tested in accordance to IESNA LM-79.

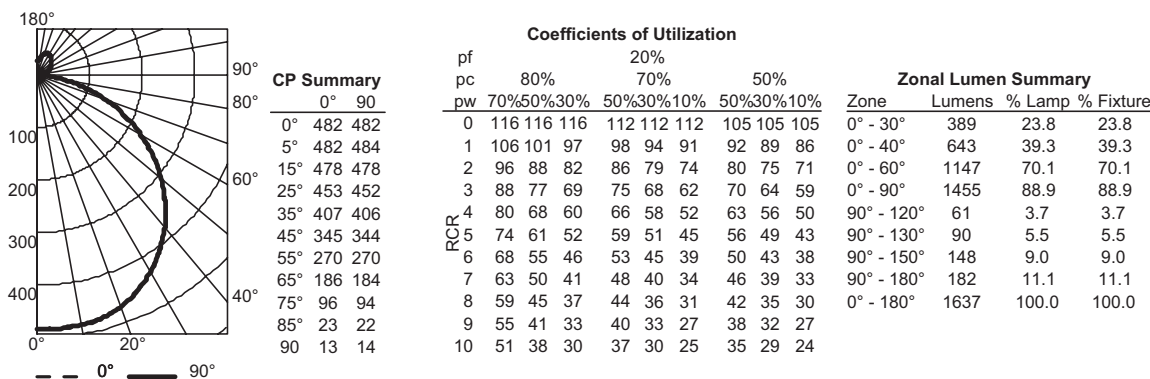

**FMABFL 20830 F22**, 1,545 delivered lumens, test no. LTL25730, tested in accordance to IESNA LM-79.

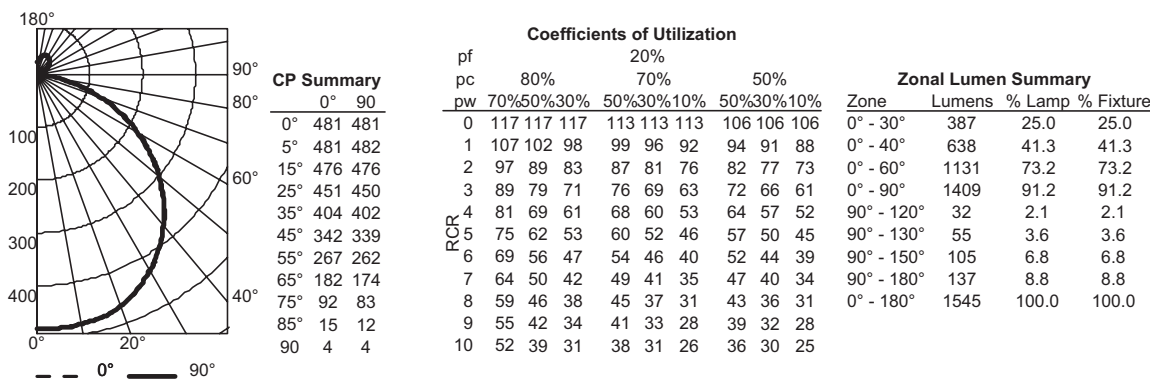

## ADDITIONAL INFORMATION

### SUGGESTED DIMMERS

The Aberdale Collection is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)	Manufacturer	Part number(s)
Leviton	6633P	Lutron	DVELV 300P
	IPL06		Skylark 300P
	6674P		NTELV 300
	IPE04		NLV 600
	Trimatron 600W	Synergy	ISD 600 I 120