

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the home.

ATTRIBUTES

Solid wood frame accented with popular crown molding design. Available in oak, unfinished oak, white, maple and off white finishes. Unique flush mount system eliminates light leaks. Durable, milk white acrylic, dropped dish diffuser provides a wide spread, uniform illumination. Matt texture prevents fingerprints. Lift and shift diffuser provides easy access for cleaning and maintenance. Available in three sizes: 1'x4', 2'x2', or 1-1/2'x4'.

Utilizes linear T8 lamps for energy efficiency, superior color rendering and long life (not included).

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

RE ballast fixtures are CUL listed (standard), suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).


Guaranteed for two years against mechanical defects in manufacture.

Catalog Number Notes Туре

Indoor Decorative

Cambridge **Linear Flush Mount**

Linear T8 Fluorescent

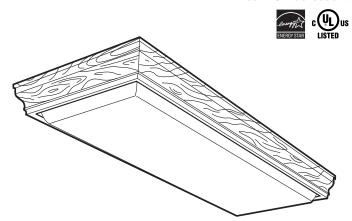

DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1'x4'		11430	(2) 32W linear T8	15-1/2" (39.4)	53-1/8" (134.9)	4-1/8" (10.5)
2'x2'		11431	(2) 31W linear T8 U31 or U316	29" (73.6)	29" (73.6)	4-1/8" (10.5)
1-1/2' x 4'		11432	(4) 32W linear T8	20-7/8" (53.0)	53-1/8" (134.9)	4-1/8" (10.5)

Finish

Unfinished

White

Maple

Off-white


0 A 0ak

WH

MA

0W

UNFIN



Options

THD, instant start

THD, rapid start

CSA CSA Certified

Consult factory for other

options and accessories

Electronic ballast, <20%THD


T8 electronic ballast, <10%

T8 electronic ballast, 10%

Example: 11430RE OA

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.



RE 120 volt residential electronic ballast (standard) (blank) Other voltage and ballast types

available (see ballast/voltage)

Lamp⁵ (blank) RE ballast fixtures only

Non-RE ballast fixtures only **U31** 31W T8-U (1-5/8" leg)⁶ U316 31W T8-U (6" lea)6

32 32W T8 (4' fixtures only)

GEB10IS

GEB10RS

Ballast/Voltage7

fixtures only

(blank) RE ballast

MVOLT Multi-volt

120 120 volt

277 277 volt

347 volt

Lamps not included.

Use with non-dimmable switches only.
Lamp configuration for **RE** fixtures is standard **U316** (6° leg).

Residential electronic ballast standard and requires **RE** designation.

No designation for lamp type is required on **RE** ballast fixtures.

Only available with 2'x2' fixtures (Also 1-5/8" leg can be ordered on **RE** ballast 2x2 fixtures).

No designation for ballast/voltage type is required on **RE** hallast fixtures.

No designation for ballast/voltage type is required on RE ballast fixtures.

Accessories/Replacement parts

DSBDDROP DSBDDROP2 D15SBDDROP

x 4' dropped white acrylic diffuser x 2' dropped white acrylic diffuser 1-1/2' x 4' dropped white acrylic diffuser

^{*} Extension from ceiling

All dimensions are in inches (centimeters)

Cambridge Linear Flush Mount

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.



Consumer Products