



Catalog Number	
Notes	Type

Indoor General Purpose

Vapor Tight

Harsh Environment Utility

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use where dust, dirt, humidity, and moisture are present.

ATTRIBUTES

Rugged die cast aluminum housing with moisture seal gasket for a vapor-tight seal, keeping out moisture, dust and humidity. Glass globe protects bulb from the elements. Openings on top and sides with removeable screw-plugs provide easy access for installation and maintenance.

Utilizes maximum (1) 150W incandescent lamps for energy efficiency, superior color rendering and long life (not included).


LISTING

CUL listed to US and Canadian safety standards and rated for wet locations. Can be ceiling or wall mounted.

WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

Incandescent

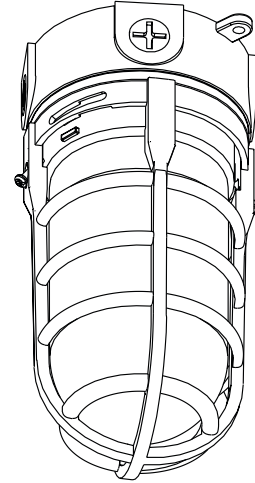


DIMENSIONS

Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Height inches (cm)
	OVT 150I	(1) 150W incandescent lamp	4-3/16" (10.6)	9-1/8" (23.3)

* Extension from ceiling

All dimensions are in inches (centimeters)



ORDERING INFORMATION

Example: **OVT 150I 120**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

OVT 150I	120
Model Number¹	Voltage
OVT 150 (1) Maximum 150W incandescent lamp required	120 120 volt (standard)

Notes:
1. **REQUIRES** - (1)150w incandescent lamp - not included.

Vapor Tight General Purpose

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.