Catalog Number


Notes

Tvpe

Indoor General Purpose Cabinet Light Linkable - T5

Linear T5 Fluorescent





FEATURES & SPECIFICATIONS

INTENDED USE

Provides task or accent illumination in residential and light commercial applications. Ideal for use under cabinets offering shadow-free lighting in kitchens and work areas, in bookcases, display cabinets or above cabinets setting a warm, inviting atmosphere in the kitchen.

ATTRIBUTES

Low profile design, with off/on rocker switch. Can be direct wired or powered by 5' cord-and-plug (Included). Connect multiple fixtures with 13" connector cord (Included).

Rugged post painted low profile steel housing, available in either white or bronze finish. Acrylic white diffuser provides soft widespread illumination with zip-lock design for easy installation, lamp access, cleaning and superior retention. Separate snap on/off service tray for easy maintenance.

Includes (1) linear T5 3500K fluoresent lamp for energy efficiency, superior color rendering and long life.

Standard with residential-grade electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics.

For use with non-dimmable switches only.

All mounting hardware included.

Available in resale packs of six only.

LISTING


CUL listed to US and Canadian safety standards and suitable for damp locations. ENERGY STAR® qualified.

WARRANTY

Guaranteed for two years against mechanical defects in manufacture.


DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
12"		UC5D 8	(1) 8W linear T5	2-5/8" (6.7)	12-1/4" (30.5)	1" (2.5)
23"		UC5D 14	(1) 14W linear T5	2-5/8" (6.7)	22-3/4" (57.8)	1" (2.5)
34"		UC5D 21	(1) 21W linear T5	2-5/8" (6.7)	34-1/2" (87.6)	1" (2.5)
	n from ceiling		. ,	sions are in inches	. ,	



ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories and replacement parts as separate catalog numbers.

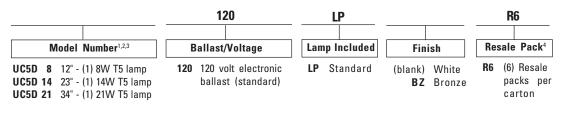

	Note: 1. //	
UCD JB R12 UC ERC R12	Splice box - allows for quick and easy direct wiring 1-1/8" row connector for end-to-end connections	2. U 3. M si
UC ERC24 R12 UCH WWC R12	24" connector cord for longer length connections 18" white cord cover to conceal cord	w 4. Re 5. Re

Light Concepts Indoor General Purpose - Cabinet Lighting

Example: UC5D 8 120 LP R6

- us. I**NCLUDES** Linear T5 fluorescent lamp. Use with non-dimmable switches only. Maximum quantity of cabinet fixtures that can be connected from a
- single power source can not exceed 540 watts from the lamp Wattage. Resale packs must be ordered in increments of 6. Resale packs must be ordered in increments of 12.

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

If lamp is marked (1) it contains Mercury. Follow disposal laws. See WWW.LAMPRECYCLE.ORG

Si la lampe indique 🕒 une teneur en mercure. Suivre les lois sur l'élimination des déchets.

Si la lámpara esta marcada 🗐 en que contiene Mercurio. Siga leyes de disposición.

> Consumer Products Group One Lithonia Way, Conyers, GA 30012 Phone: 800-748-5070 Fax: 770-860-3903 In Canada: 160 Avenue Labrosse, Point-Claire, P.Q., H9R 1A1 www.lightahome.com