

FEATURES & SPECIFICATIONS

INTENDED USE

General illumination for utility applications.

CONSTRUCTION

Housing - Constructed from one-piece die-cast aluminum. Three threaded 1/2" NPS plugs allow conduit entry, or the housing can be mounted over the outlet box.

Gasket - One-piece silicone perimeter lens gasket and closed-cell neoprene housing gasket help to seal out moisture and contaminants.

FINISH

Post-painted after fabrication in dark bronze polyester powder coat.

OPTICAL SYSTEM

Lens - Clear prismatic, UV-stabilized, polycarbonate lens, nominal thickness .125" (1/8").

ELECTRICAL SYSTEM

Ballast - Ballast is High Reactance, High Power Factor.

Socket - Porcelain, medium-base, horizontally oriented socket with copper alloy nickel-plated screw shell and center contact.

INSTALLATION

Ceiling mounting only. For maximum vandal-resistance, mount unit to structure through four mounting holes provided.

LISTING

UL Listed (standard). CSA Certified. UL listed for wet locations.

WARRANTY

Fixtures are covered by Lithonia Lighting 24-month warranty against mechanical defects in manufacture.


Catalog Number
Notes
Type

Contractor Select

Ceiling-Mount Utility



VRC

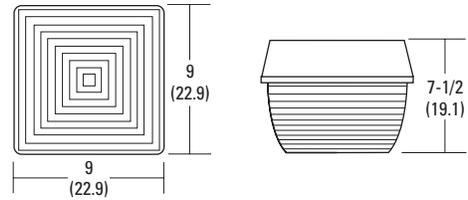

Dimensions are inches (centimeters).

ORDERING INFORMATION

Catalog Number	UPC	Description	Wattage	Lamp Source	Voltage	Finish	Lamp Included	Approx. Weight (lbs)	Pallet Qty	Standard Carton Qty
VRC70ML 120/277 M6	745974487333	Ceiling-mount utility	70	MH	120/277	Dark bronze	Y	9	60	6
VRC70SL 120/277 M6	745974487340	Ceiling-mount utility	70	HPS	120/277	Dark bronze	Y	9	60	6

Ceiling-Mount Utility Lighting
