

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

CONSTRUCTION

Features a matte white acrylic diffuser with chrome accents. Three double-arch finials finish the clean, contemporary look.

OPTICS

Produces 1,700 lumens at 50,000 hours of life.

ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 23 watts, 73 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included. Can be wall or ceiling mounted.

LISTINGS

cUL Listed to US and Canadian safety standards.

WARRANTY


5-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Decorative Indoor

Vela LED Flush Mount

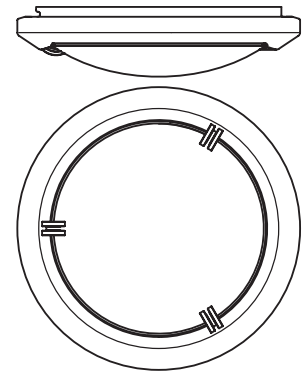

Specifications

Depth: 4 (10.2)
Diameter: 14-1/2 (36.8)
Weight: 1.5 lbs

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMVELL 14 20830

Series		CRI	Color temperature
FMVELL 14	LED flush mount 14" diameter	208 >80	40 4000K
			35 3500K
			30 3000K
			27 2700K

LED Flush Mount Vela

SUGGESTED DIMMERS

The FMVELL is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120