



**Codes/Standards
Applicable**

- ANSI Z124.1.2
- CSA B45 Series

Whirlpool Tub Showers:

- UL1795
- ASME A112.19.7
- CSA C22.2 No. 218.3-93
- CSA B45.10

KEY BENEFITS

A practical choice, complete with massage systems the whole family can enjoy.

STANDARD FEATURE(S)


- Integrated shelves
- Integrated soap dishes
- Integrated towel bar
- Roof cap
- Left or right-hand drain
- Integrated apron with access panel

Colors

Standard Acrylic Colors



Non-Standard Acrylic Colors

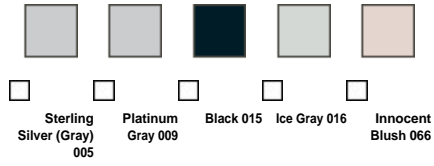

Colors shown are for reference purposes only and are subject to change without notice. Exact matches are not possible with your monitor display or printing method used.

Here are the electrical specifications for all MAAX Collection tub shower therapeutic systems offered in the United States.

PLEASE NOTE THAT SOME SYSTEMS MAY NOT BE AVAILABLE ON THE PRODUCT YOU HAVE SELECTED.

Please refer to the *Common Options* and *Massage System(s)* sections for more details.

HYDROMAX	
Pump: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with Chromatherapy (option).	
Pump 2 (for large bathtubs): Requires a dedicated circuit protected by a Class A GFCI.	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Pump	1.5HP / 120V / 12.5A / 60Hz
REST™ Pump Option	1HP / 120V / 9.4A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

CHROMATHERAPY	
Requires a dedicated circuit protected by a Class A GFCI.	

STEAMAX	
Requires a dedicated 240 Volt, 1 phase circuit.	
All acrylic showers	5kW / 240V / 21A
Exposé™ Shower	6kW / 240V / 25A

SHOWER LIGHT	
Requires a dedicated circuit protected by a Class A GFCI.	

Installation Note

Install this product according to the *Installation Guide*.
All electrical wiring must be done per national/local electrical codes.