



**Codes/Standards
Applicable**

- ANSI Z124.1.2
- CSA B45 Series

STANDARD FEATURE(S)


- Built-in shelves
- Right or left-hand built-in seat
- Integrated towel bar
- Textured bottom for greater stability

PLUMBER FEATURE(S)


- One-piece installation

Colors

Standard Fiberglass Colors

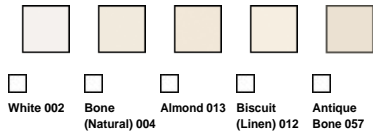

Non-Standard Fiberglass Colors

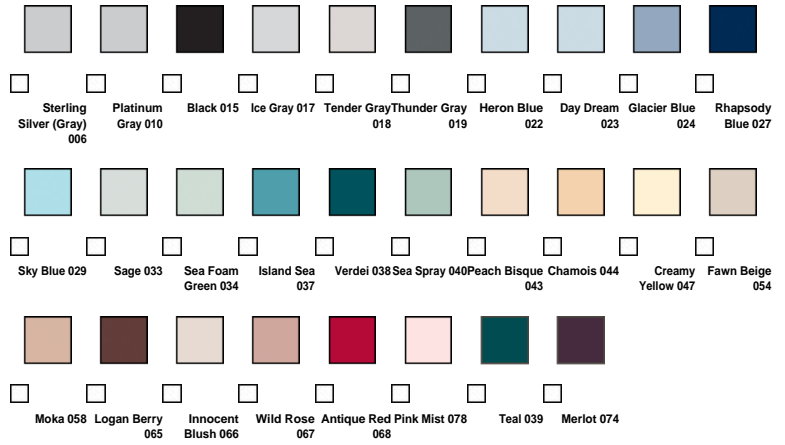

Colors shown are for reference purposes only and are subject to change without notice. Exact matches are not possible with your monitor display or printing method used.

Here are the electrical specifications for all MAAX Professional shower therapeutic systems offered in the United States.

PLEASE NOTE THAT SOME SYSTEMS MAY NOT BE AVAILABLE ON THE PRODUCT YOU HAVE SELECTED.

Please refer to the *Common Options* and *Massage System(s)* sections for more details.

Installation Note

Install this product according to the *Installation Guide*.

All electrical wiring must be done per national/local electrical codes.

STEAMAX	
Requires a dedicated 240 Volt, 1 phase circuit.	
All acrylic showers	5kW / 240V / 21A
Nuevo™ Shower	6kW / 240V / 25A