



**Codes/Standards
Applicable**

- ANSI Z124.1.2
- CSA B45 Series

Whirlpool Bathtubs:

- UL1795
- ASME A112.19.7
- CSA C22.2 No. 218.2
- CSA B45.10

STANDARD FEATURE(S)

- Integrated faucet area
- 3" above the floor rough: pipe directly under the bathtub without having to relocate the existing drain
- Asymmetrical apron design for a modern look
- Freestanding installation including one-piece apron
- Two-person bathtub with spacious interior
- Adjusting leg system for leveling
- Centre drain and smooth bottom

COMMON OPTIONS

- Flexible waste and overflow
- Metal trim kit for Aeroeffect air push control
- [One chromatherapy light](#)
- White foam cushion

MASSAGE SYSTEM(S)

- [Aeroeffect with air push control](#)

Colors

Standard Acrylic Color



White 001

Colors shown are for reference purposes only and are subject to change without notice. Exact matches are not possible with your monitor display or printing method used.

Model Specifications, Options and Accessories

✓	No	Model	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	105516-000	Bathtub Available in White (001) only	66 1/2 X 36 1/2 X 24	149	37
Water Capacity: Minimum: 14 gal. Maximum: 65 gal.					

BATHTUB MODEL WITH MESSAGE SYSTEM SEE BASE MODEL FOR COLORS




✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	105516-103	Aeroeffect with air push control (air system)	66 1/2 X 36 1/2 X 24	174	37

COMMON OPTIONS

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	OPT 10053	One chromatherapy light (factory installed)	2 3/8	2.5	N/A
☐	OPT 20029-XXX	Metal trim kit for Aeroeffect Air Push Control (103) (factory installed) Available colors: Chrome (084), Polished Brass (085) and Brushed Nickel (105)	N/A	0.125	
☐	OPT 20138-084	Flexible waste and overflow (included in product packaging)		N/A	
☐	OPT 20138-105	Available colors: Chrome (084) and Brushed Nickel (105)		N/A	

Accessories

✓	No	Description	Dimensions in. (mm)	Approx. Weight lb (kg)	PKG ft3 (m3)
☐	10004306-001	White foam cushion with 2 suction pads (sold separately)	11 1/2 X 6 1/2 X 1	1	0.27
☐	10004520-XXX	Metal Trim Kit for Aeroeffect Air Push Control (103) (sold separately) Available colors: Chrome (084), Polished Brass (085) and Brushed Nickel (105)	N/A	0.125	N/A
☐	10025755-084	Flexible waste and overflow (sold separately)		N/A	
☐	10025755-105	Available colors: Chrome (084) and Brushed Nickel (105)		N/A	

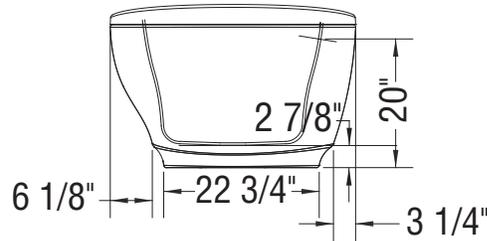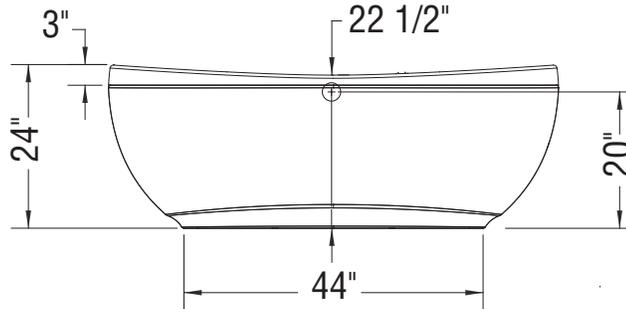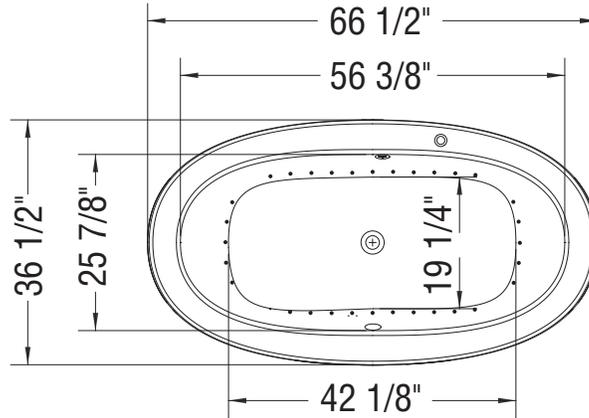

(•): Indicates airjets positioning

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Here are the electrical specifications for all MAAX Professional bathtub therapeutic systems offered in the United States.

PLEASE NOTE THAT SOME SYSTEMS MAY NOT BE AVAILABLE ON THE PRODUCT YOU HAVE SELECTED.

Please refer to the *Common Options* and *Massage System(s)* sections for more details.

WHIRLPOOL	
Pump: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with Chromatherapy (option).	
Heater: Requires a dedicated circuit protected by a Class GFCI.	
Pump	3/4HP / 120V / 7.5A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

AEROEFFECT WITH AIR PUSH CONTROL	
Blower: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with Chromatherapy (option).	
Blower	1.4 HP / 120V / 9.5A / 60Hz

COMBINED WHIRLPOOL / AEROEFFECT WITH AIR PUSH CONTROL (W/A)	
Blower: Requires a dedicated circuit protected by a Class A GFCI.	
Pump: Requires a dedicated circuit protected by a Class A GFCI. This circuit can be shared with Chromatherapy (option).	
Heater: Requires a dedicated circuit protected by a Class A GFCI.	
Blower	1.4 HP / 120V / 9.5A / 60Hz
Pump	3/4HP / 120V / 7.5A / 60Hz
Heater	1500W / 120V / 12.5A / 60Hz

CHROMATHERAPY
Requires a dedicated circuit protected by a Class A GFCI.

Installation Note

Install this product according to the *Installation Guide*.

All electrical wiring must be done per national/local electrical codes.