



C-IV

Designed in 2013

The C-IV, organic and modular with twin curved concave blades, is sure to tilt heads upward. Its commanding 60-inch span of resilient polycarbonate construction maintains warmth in either walnut or rosewood tones. Constructed of cast aluminum, polycarbonate and heavy stamped steel, the C-IV carried a limited lifetime warranty.



shown in Brushed Nickel with Rosewood blades



shown in Brushed Nickel with Rosewood blades and light cap

SKU NAMING CONVENTION	
SKU#	CIV-XX-XXX (Model+Finish+Blade Type)
Finishes	Brushed Nickel - BN
Blade Finishes	Walnut - WN Rosewood - RW

STANDARD EQUIPMENT	
One downrod of 10 inches / 13 cm	
Vaulted ceiling canopy for up to 29°	
Light cover	
3-speed RF remote control in black	ACCESSORY Decora-style, 3-speed, Lutron SFSQ-LF non-dimmable wall control
	


CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

Matthews Fan Company
 1881 Industrial Drive
 Libertyville, IL 60048
 Tele: 847.680.9043
 Fax: 847.680.8140
www.matthewsfanco.com
 © 2017 Matthews Fan Company. All rights reserved.

C-IV

TECHNICAL SPECIFICATIONS

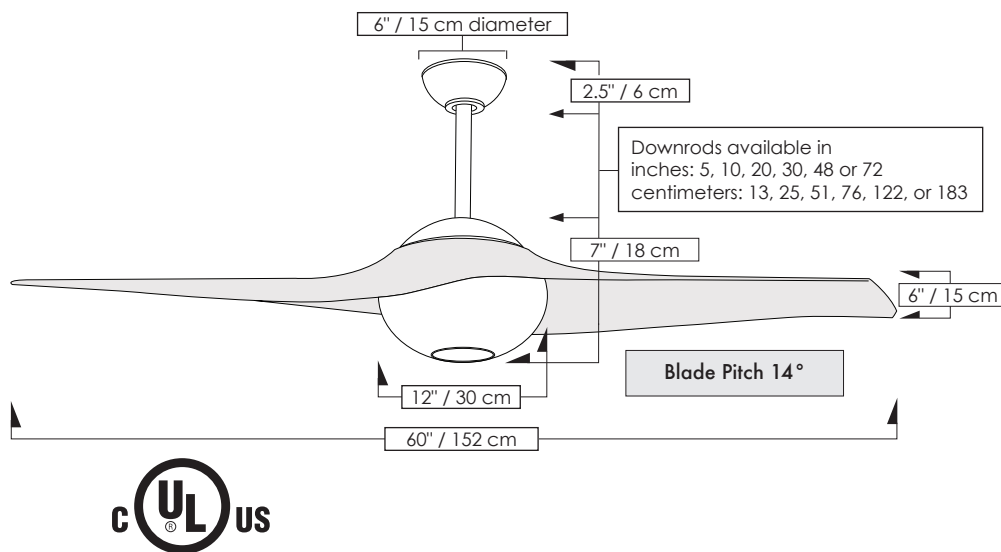

FAN SPECIFICATIONS						
Fan Diameter		60 inches / 152 cm				
Overall Drop		7 inches / 18 cm + downrod length				
Fan Weight		28 lbs				
Voltage		110 (Please contact us for 220 conversion)				
Motor Type		AC				
Downrods Lengths <i>Field cuttable. Non-threaded</i>		inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76,122,183				
Downrod Diameter		1 inch				
Remote Control		Hand-held & wall-mountable 3-speed				
Wall Control		Lutron decora-style wall control: SFSQ-LF				
Environment		Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible				
Ambience		Silent				
Safety Certification		UL / CUL				
Warranty		Limited Lifetime				
MOTOR EFFICIENCY DATA AT HIGH SPEEDS						
RPM		130				
CFM		6424.25				
Watts		72.08				
CFM/Watt		89.13				
Blade Pitch		14°				
LIGHT KIT PHOTOMETRICS						
Lamping (Replaceable)	Remote Dimmable	Temperature	Delivered Lumens	CRI	Watts	Hours
Intergrated LED	Yes	2980 K	484	91	16	36,000

