

INSTALLATION INSTRUCTIONS

For Model 976-1

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

MOUNTING THE BACKPLATE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two mounting screws (B) about 1/4" into the pre-drilled holes in the crossbar (A) spaced the same distance apart as the holes in the ceiling Pan (D).
4. Attach the crossbar (A) to the outlet box using two outlet Box Screws (C). The side of the Crossbar marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

1. While holding the canopy (D) toward the ceiling, connect the electrical wires as follow, Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connects fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar using the green screw provided.



MOUNTING FIXTURE AND SHADE

1. Finish mounting the ceiling pan (D) by placing it over both mounting screws (B) so that they protrude through the "keyholes" in the bottom of the pan. Rotate the pan until the screws are in the slots of the "keyholes" and tighten with a screwdriver.
2. Install the bulb in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
3. Place the hex nut (E) onto the nipple (F) then thread the nipple (F) into the ceiling pan (D). Place the glass shade (G) over the ceiling pan (D) allowing the nipple (F) to protrude through the bottom hole in the glass.
4. While holding the glass shade (G), slide bottom cap (H) over the nipple (F) and tighten with finial (I) against ceiling pan (D)

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

MIN 90°C SUPPLY CONDUCTORS.

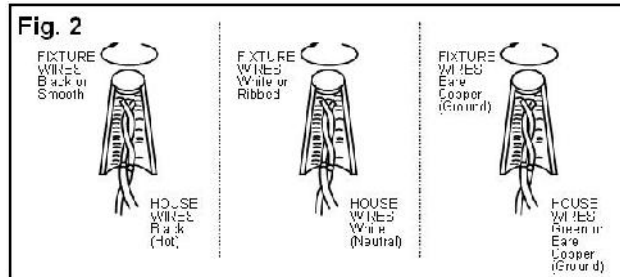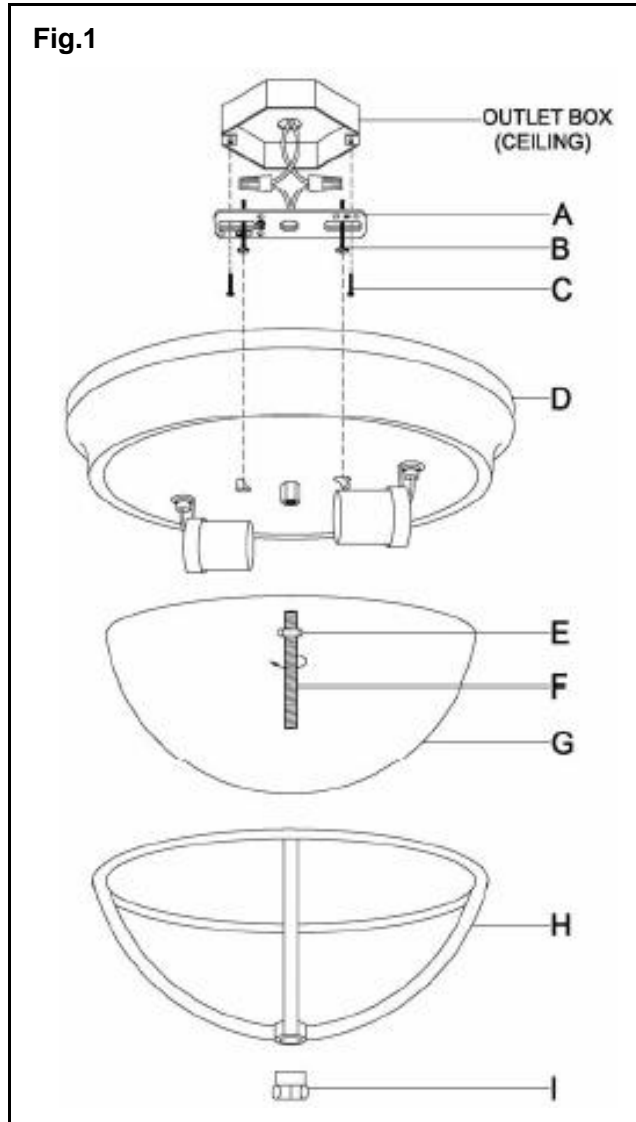

LA-1913E