

INSTALLATION INSTRUCTIONS FOR 1230-580  
For Wall Mount Fixtur

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

**MOUNTING THE FIXTURE**

Installation (see fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Attach the crossbar to the junction box using two junction box screw. The side of the crossbar marked "GND" must face out.
3. Thread the nipple part way into the center hole of the crossbar and secure with hex nut.
4. Follow wiring instructions carefully (see fig.2)
5. Place the fixture body (A) over the nipple, then tighten it with cap nut (B).
6. Install the light bulbs (not included) in accordance with the fixture's specifications: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
7. Raise glass shade (D) to fixture body (A), aligning glass hole with pipe (C), attach rubber cushion (E), then screw it with hex nut (F), attach the finial base (G) to the end of pipe (C) and tighten firmly with brass ball (H).

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the **green ground screw on the crossbar**.
2. Tuck the wire connections neatly into the wall junction box..

Fig.1

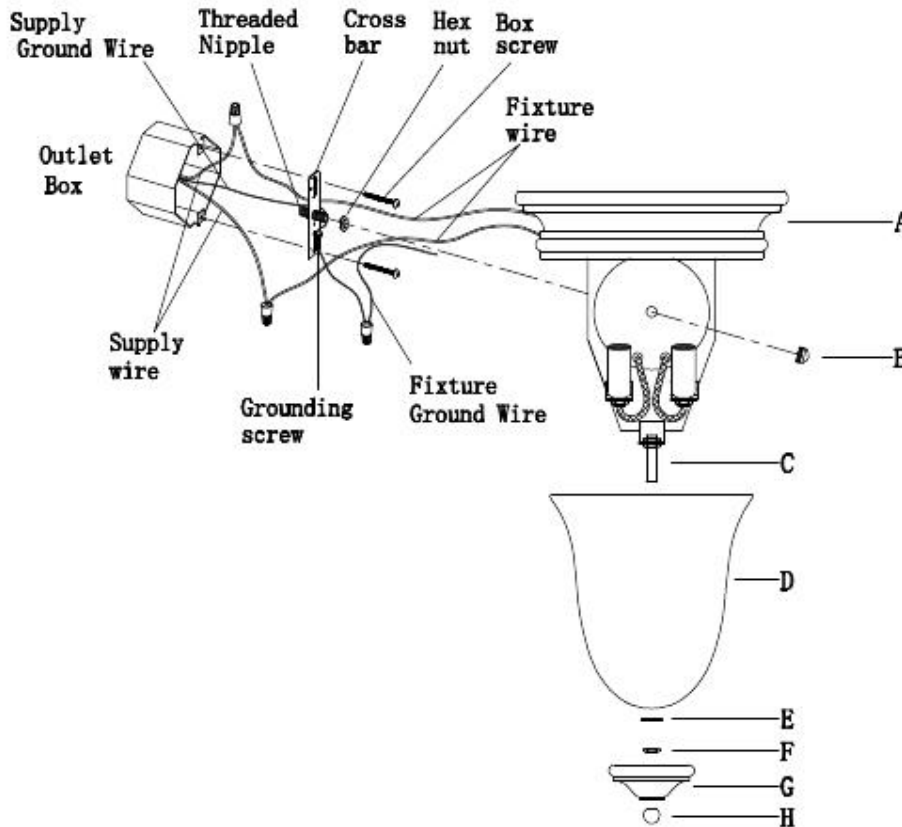


Fig.2



MIN 90°C SUPPLY CONDUCTORS

