# **HLK13 SERIES**

## FLAT BAR LEVER



Available Finishes:



US15 Satin Nickel



US26 Polished Chrome



### **FEATURES & OPTIONS:**

- Door Thickness Fit 1-3/8" to 1-3/4" standard door thickness
- Door Preparation Cross bore: 2-1/8", edge: 1"
- Trim Guard No
- Latch Backset 2-3/8" or 2-3/4"
- Faceplate 1" x 2-1/4" radius corner
- Spindle Type Square
- Bolt 1/2" throw
- Cylinder Zinc cylinder KW1 keyway 5 brass pins
- Keys 2 brass keys, nickel plated, stamped with key code
- Strike Plate 2-1/4" x 1-3/4" radius corner
- Handing Reversible non-handed
- · Material Zinc alloy, steel, brass
- Rosette Stamped steel
- ANSI/BHMA A156.2 grade 3 certified

### **FUNCTIONS:**

Entry – (F109)

Both levers locked or unlocked by key outside or turn-piece inside

Privacy – (F76)


Both levers locked or unlocked by turn-piece inside. Outside lever unlocked by coin or screwdriver


Passage – (F75)

Latchbolt operated by lever from either side at all times

Dummy

Pull one/both side, no mechanical operation

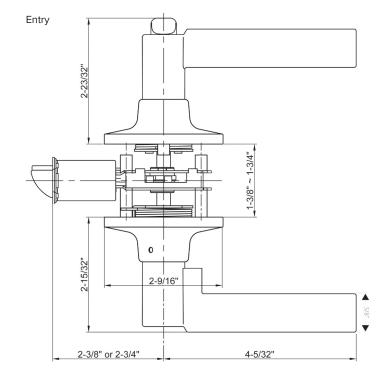

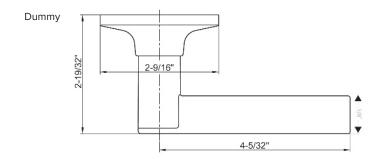

#### **WARRANTY:**

- Limited Lifetime Mechanical Warranty
- · Limited 5-Year Finish Warranty

©2020 PL Sourcing, Inc. 1020 2230576 HLK13\_Spec.pdf Page 1 of 1