
VOGUE- model: WS-31

LED Vanity/Sconce Luminiare



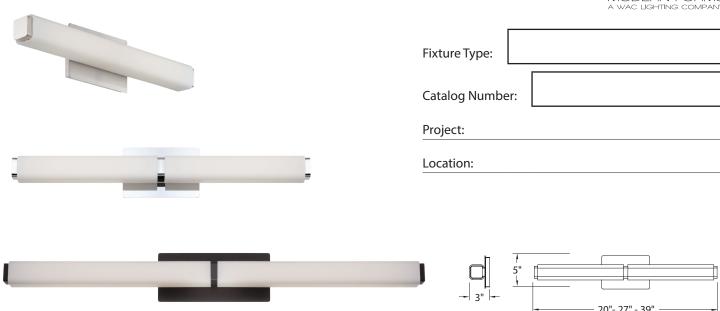

PRODUCT DESCRIPTION

From transitional to contemporary, the Vogue family coordinates with popular bath hardware and metal finishes, An extensive range of LED wall luminaires are available for every application and environment. Crafted of mouth blown etched opal glass and designed with hidden hardware, these luminaires offer powerful lumen output and excellent color rendering.

FEATURES

- ETL & cETL listed for damp locations
- · Mount vertically or horizontally
- · Low profile design
- Replaceable LED module
- 277V option and alternate color temperature available special order
- 120° beam angle
- 80,000 hour potential life
- Color Temp: 3000K
- CRI: 90

SPECIFICATIONS

Construction: Aluminum with mouth blown etched opal glass.

Power: Transformer located in outlet box.

Light Source: High output LED.

 $\label{eq:Dimming:Dims} \textbf{Dims to 10\% with an electronic low voltage (ELV) dimmer.}$

Mounting: Mounts directly to junction box.

Finish: Brushed Nickel (BN), Bronze (BZ), Chrome (CH).

 $\textbf{Standards:} \ \mathsf{ETL} \ \& \ \mathsf{cETL} \ \mathsf{listed}. \ \mathsf{ADA} \ \mathsf{compliant}.$

FIXTURE PERFORMANCE


		LED		Photometric
Model	Watt	# of LEDs	Lumens	Lumens
WS-3120	30W	72	1875	970
WS-3127	38W	96	2500	1160
WS-3139	53W	144	3750	1740

REPLACEMENT GLASS

Model	Fixture	
RPL-GLA-3120	WS-3120	
RPL-GLA-3127	WS-3127	
RPL-GLA-3139	WS-3139	

ORDER NUMBER

Model	Length		Finish	
WS-31	20 27 39	20" 27" 39"	BZ	Brushed Nickel Bronze Chrome



FINISHES





Example: WS-3127-BN

For 277V, add an "F" before the finish: WS-3127F-BN

For alternate color temperature, special order adding 30 or 35: WS-3127-30-BN

Modern Forms – A WAC Lighting Company www.modernforms.com Phone (800) 526.2588 • Fax (800) 526.2585 **Headquarters/Eastern Distribution Center**44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585