

FAUCET DESCRIPTION

- · Metal construction with various finishes identified by suffix
- Inlet shanks will accept 3/8" ball nose connections
- With Protégé® side spray

OPERATION

- · Lever style handle
- · Will operate with less than 5 lbs. of force

FLOW

• Tap water: 2.0 gpm max (7.6 L/min)

CARTRIDGE

- 1224 cartridge design
- · Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1and all applicable requirements referenced therein including NSF 61/9
- Meets Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🚯 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications



Banbury®
Two Handle Lever Kitchen Faucet
with Protégé® Side Spray

Models: CA87060 series

NOTE: This faucet is designed to be installed through 4 holes 1" Min. Dia.

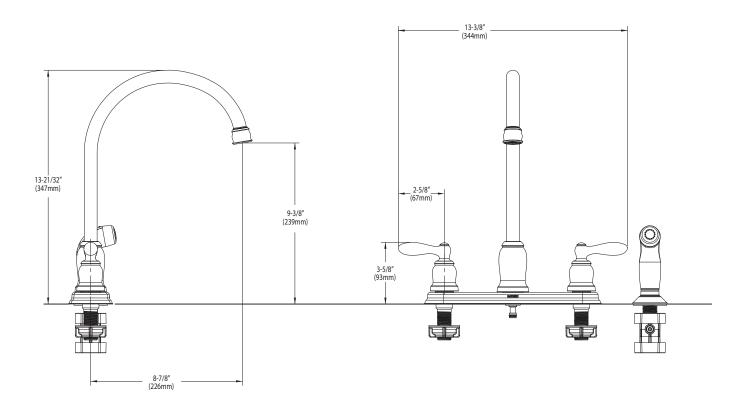

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com