MOEN[®]

Specifications

DESCRIPTION

- Fixed mount showerhead
- · Various finishes identified by suffix
- 1/2" IPS connection
- Includes Hydroboost™ air-induction technology

OPERATION

- Four functions
- Rotate outer ring to select function

FIOW

- Designed to deliver 1.75 gpm (6.62 L/min) MAX at 80 psi (for models manufactured after 3/1/18)
- Designed to deliver 2.0 gpm (7.6 L/min) MAX at 80 psi (for models manufactured before 3/1/18)

STANDARDS

- Third party certified to meet WaterSense®, ASME A112.18.1/ CSA B125.1 and all applicable requirements referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations




Avira™ 4-Function Showerhead with Hydroboost™

Model: 26313 series



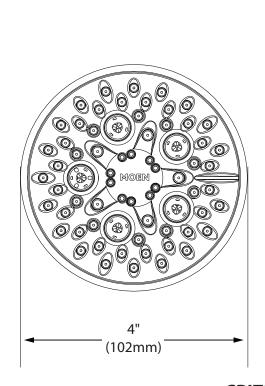

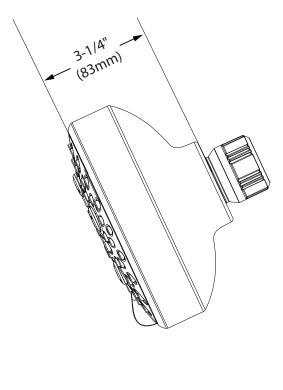

CRITICAL DIMENSIONS

(DO NOT SCALE)