MOEN[®]

Specifications

DESCRIPTION

Various finishes identified by suffix
 Designed using ocean recycled plastic
 Magnetix[™] technology features an innovative magnetic

Magnetix[™] technology features an innovative magnetic docking system Includes rainshower, handshower, hose and magnetic docking system

60" double interlock spiral metal hose (for 220C2 series)

72" double interlock spiral metal hose (for 220C3 series)

1/2" IPS connection

OPERATION

 Infiniti™ dial allows users to precisely adjust to their preferred balance of force and coverage 3-way diverter provides ability to flow each shower head separately or combined for more coverage

Pause/trickle function allows to momentarily pause the handshower flow Pivoting rainshower allows user to tilt rainshower 40 degrees forward and backwards

FLOW

Designed to delivery 2.5 gom (9.5 L/min) MAX at 80 psi

(for models manugactured after 3/1/18)

Designed to deliver 1.75 gpm (7.6 L/min) MAX at 80 psi

• (for models manufactured before 3/1/18)

EP suffix models are limited to 1.75gpm (6.6 L/min) MAX at 80 psi

STANDARDS

 Third party certified to ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein


WARRANTY


Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 5 year limited warranty when used in a commercial installation
 10 year limited warranty when used in a multifamily installation
 Visit www.moen.com/support for complete details and limitations



Rainshower/Handshower Combination with Infiniti™ dial and Magnetix™ Docking

MODELS: 220C2 series 220C3 series

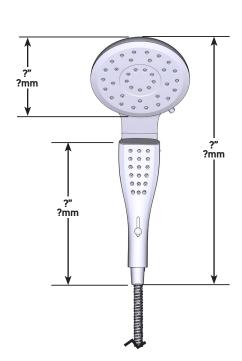

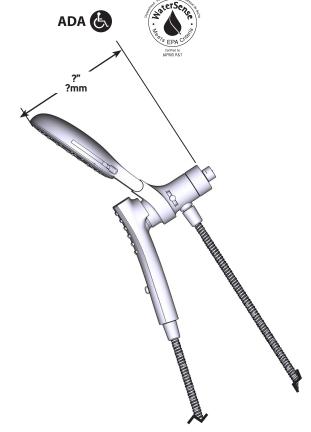

CRITICAL DIMENSIONS DO NOT SCALE