

## PRODUCT DESCRIPTION

- Brass construction w/chrome plated finish
- 3/4" IPS supply
- 3/4" top spud

## OPERATION

- Adjustable sensor eyes
- Battery powered (4) standard AA (included)
- Average battery life 250,000 cycles
- Self-diagnostic electronics
- Piston flushing mechanism
- Self cleaning filter system
- Low battery indicator light

## FLOW

- Operating pressures 10 to 125 psi
- 0.5 gpf/1.9Lpf (gallons per flush)
- 24 hour sentinel flush
- Manual override button

## VALVES

- 3/4" IPS angle stop (vandal resistant)
- Adjustable installation (left or right connection)


## STANDARDS

- Third party certified by IAPMO and CSA to meet Watersense®, ASME A112.19.2M and all applicable requirements referenced therein and complies with requirements of ASSE 1037

- **ADA** 


## WARRANTY

- Warranted for 5 years against material or manufacture defects.

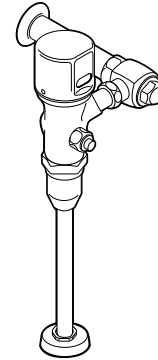

**3/4" Battery Powered Exposed Style Urinal Flush Valve**

**Model: 8315**

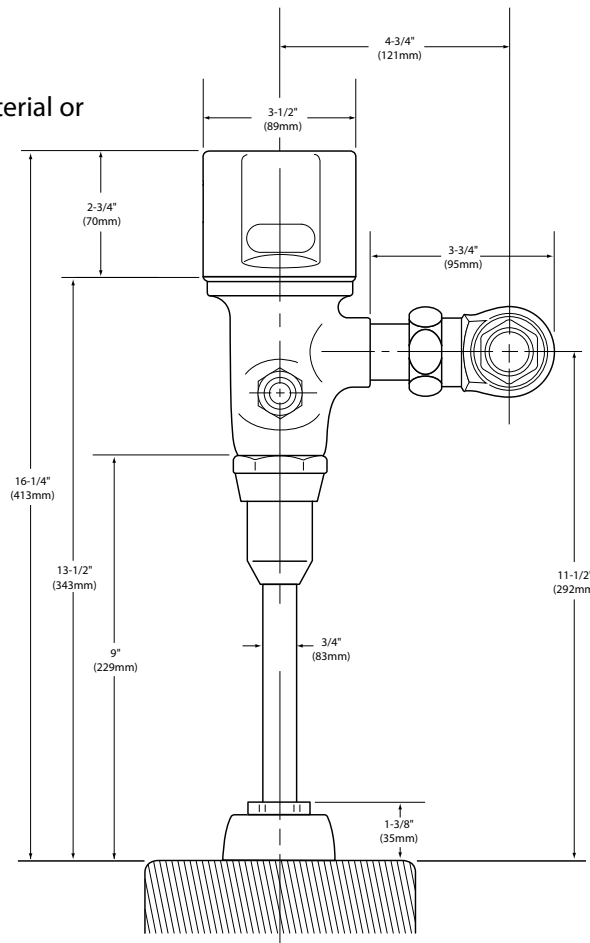

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)