

Specifications

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- · Includes non-metal pop-up waste assembly

OPERATION

- · Lever style handles
- Maximum handle(s) rotation angle is 90° to full on
- Rotate hot side counterclockwise to open clockwise to close)
- Rotate cold side clockwise to open (counterclockwise to close)

FLOW

• Aerator is limited to 1.5 gpm max (5.7 L/min)

CARTRIDGE

- 1224 cartridge design
- · Nonmetallic and stainless steel material

STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🕒 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

NOTE


*Service kits available for thicker or thinner deck applications. See Parts view.



SAGE® 4" Lavatory Faucet with Waste Assembly

Models: 84600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3 HOLES, 1" MIN. DIA.

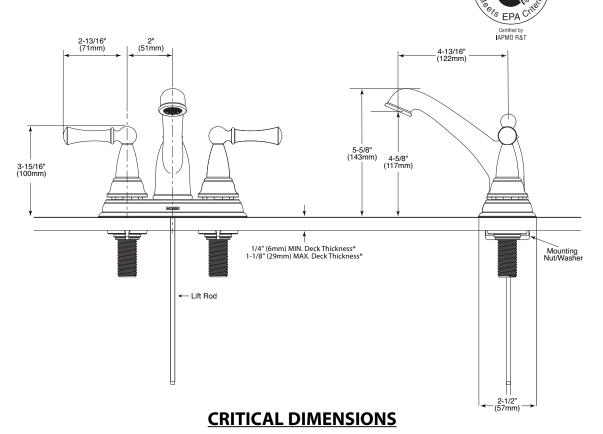

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com