

Mounts with or without deck plate

**FAUCET DESCRIPTION** 

360° rotating spout

Single handle lever

**Drinking Water Act** 


**OPERATION** 

**CARTRIDGE** 

**STANDARDS** 

**FLOW** 

# Specifications



## Single Handle Single Hole Mount **High Arc Kitchen Faucet**

**Models:** 87650 series with spray

A 1-1/2" (38MM) MIN. DIA. HOLE FOR VALVE AND A 1-1/4" (32MM) MIN. DIA. HOLE FOR SIDE SPRAY. HOLES ON 4" OR 8" CENTERS.

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 2 HOLES:

### ADA (5) for lever handle

WARRANTY Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

Contains no more than 0.25% weighted average lead content Complies with California Proposition 65 and with the Federal Safe

Metal construction with various finishes identified by suffix

Includes traditional side spray and quick connect system

Flexible supply lines with 3/8" compression fittings

Temperature controlled by 100° arc of handle travel

1255™ Duralast™ cartridge for Single-Handle Faucets


requirements referenced therein including NSF 61/9

Flow is limited to 2.2. gpm (8.3 L/min) at 60 psi

High arc spout provides the height and reach to fill or clean large pots

Third party certified to ASME A112.18.1/CSA B125.1 and all applicable

5 year warranty if used in commercial installations

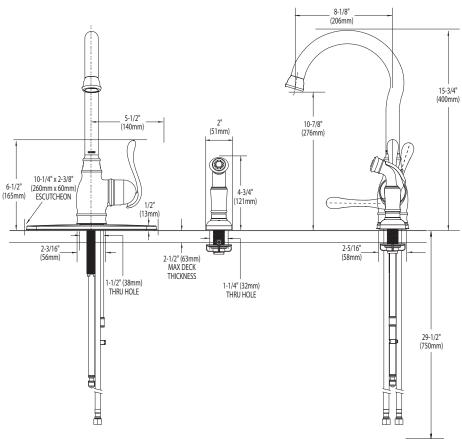

**CRITICAL DIMENSIONS** 

(DO NOT SCALE)