

# Specifications

## DESCRIPTION

- Brass construction
- 3/4" IPS connections
- Thermostatic valve design with integral checkstops

#### **OPERATION**

- Temperature lever operates through a 340 degree arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 105 degrees F (41degrees C)
- Safety stop override allows maximum temperature at 120 degrees F (49 degrees C)
- Factory established temperature range from 80 degrees F (27 degrees C) to 120 degrees F (49 degrees C)
- Must be used with at least one S3600 valve.

## CARTRIDGE


Thermostatic cartridge design with non metallic/nonferrous materials

### **STANDARDS**

 Third party certified to meet ASME A112.18.1/CSA B-125.1, CSA B125.3, ASSE 1016, ASSE 1070 and all applicable requirements referenced therein


### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## ExactTemp<sup>®</sup> 3/4" Thermostatic Valve

Model: \$3371

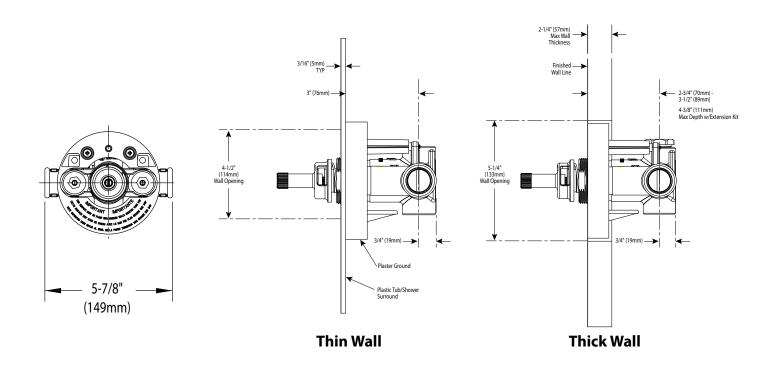

# **CRITICAL DIMENSIONS**

(DO NOT SCALE)

1/17/2012 felessed 00



# Specifications

## DESCRIPTION

- Brass construction
- 3/4" IPS connections

## **OPERATION**

 Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction

#### CARTRIDGE

Ceramic disc cartridge design

# INSTALLATION


• Volume control valve must be installed with the arrow pointing in the water flow direction

#### **STANDARDS**

 Third party certified to meet CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including ASSE1016


### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




# 3/4" Volume Control Valve

Model: \$3600





**Thin Wall** 

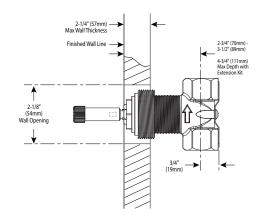

**Thick Wall** 

# **CRITICAL DIMENSIONS**

(DO NOT SCALE)