

# Specifications

## DESCRIPTION

- · Metal construction with various finishes identified by suffix
- 1/2" IPS connection

#### **OPERATION**

 Flow levers operate counterclockwise through 180 degree arc with shut off at 6 o'clock and maximum flow at the 12 o'clock position.
Shut off in clockwise direction

## **FLOW**

• 5.5 gpm @ 60 psi

## **CARTRIDGE**


- 1224 cartridge design
- Nonmetallic and stainless steel materials

### **STANDARDS**

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 👃 for lever handle


### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



**Pot-Filler Faucet** 

Models: S665 series

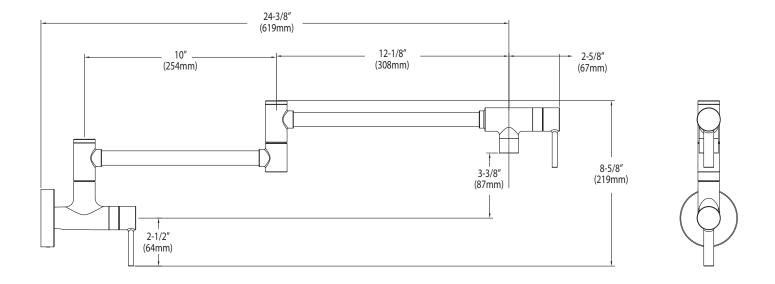

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com