MOEN

Specifications

Buy it for looks. Buy it for life.®

FAUCET DESCRIPTION

- Metal construction with chrome, oil-rubbed bronze, LifeShine[®] brushed nickel or pewter finish
- Includes showerhead, arm, flange and divertor tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm \ 2^\circ$

FLOW

• Showerhead is limited to 2.5gpm (9.5L/min)

CARTRIDGE


- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

• Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein.


WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



Vestige[™] Single Handle Posi-Temp[®] Tub/Shower (Trim Only)

Models: T2503, T2503BN, T2503ORB, T2503PW

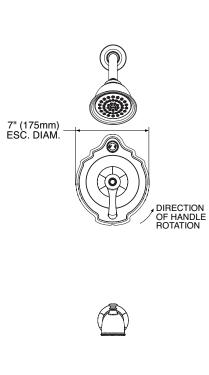

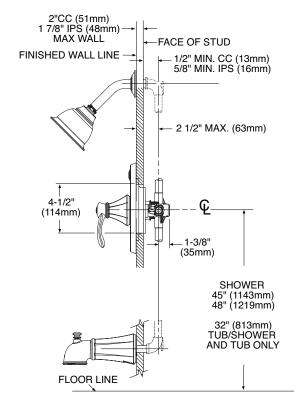

CRITICAL DIMENSIONS

(DO NOT SCALE)