



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with chrome plated, oil rubbed bronze, wrought iron, antique nickel, Lifeshine® brushed nickel, or pewter finish
- Includes 7" rainshower showerhead, arm, flange and tub spout

## OPERATION

- Flow lever operates counterclockwise through a 90° arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction
- Temperature lever operates through a 340° arc with maximum cold at full clockwise rotation and maximum hot at full counter clockwise rotation
- Factory established temperature range from 70°F (21°C) to 120°F (49°C)
- Safety stop preset at 105°F (41°C)
- Safety stop over-ride allows maximum 120°F (49°C)

## FLOW

- Showerhead limited to 2.5 gpm (9.5 L/min)

## CARTRIDGE


- 130156 thermostatic cartridge design with nonmetallic/nonferrous materials
- 130157 ceramic disc cartridge design

## STANDARDS

- Third party certified to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein including ASSE 1016

## WARRANTY



- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

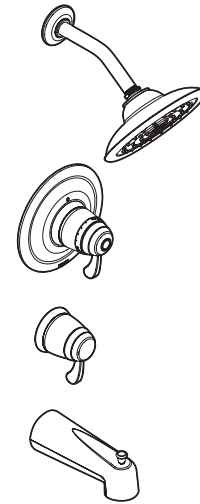

### ExactTemp® 3/4" Thermostatic Tub/Shower (Trim Only)

**Models:** TL3450, TL3450ORB, TL3450WR,  
TL3450AN, TL3450BN, TL3450PW

**Valves:** 3371, 3600  
(Sold separately)

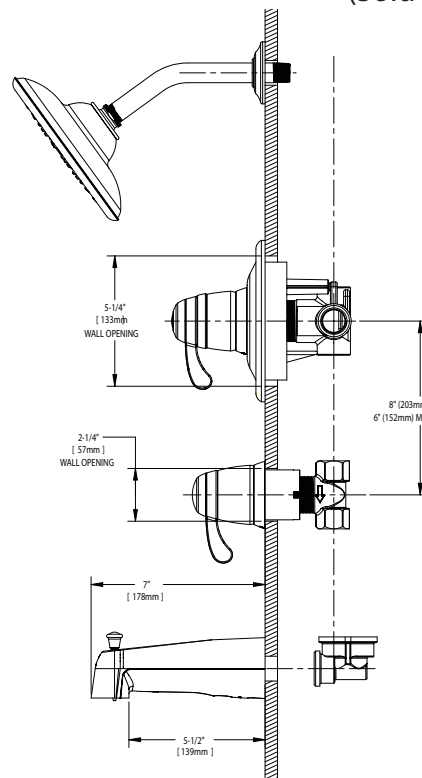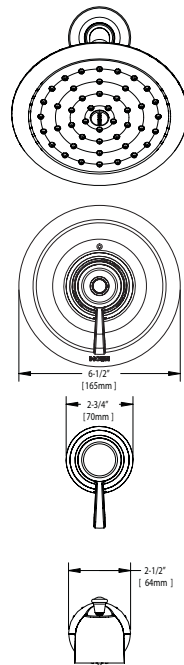

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com