

#### **DESCRIPTION**

- Handheld shower
- 69" double interlock spiral hose (metal)
- Vacuum breaker
- 30" slide bar with push button height selection
- Available in chrome, LifeShine® polished brass, LifeShine® brushed nickel, platinum, LifeShine® brushed bronze, chrome w/LifeShine® polished brass, LifeShine® satine, oil rubbed bronze or antique bronze finish

#### **OPERATION**

- 4-function: massage, vigorous, full and combination: rotate outer ring to select
- Wall bracket rotates to adjust angle of hand shower

#### **FLOW**

• Designed to deliver 2.5 gpm (9.5L/min) max. at 60 psi

#### **STANDARDS**

 Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein

#### **WARRANTY**


• Warranted for one year against material or manufacturing defects

## Specifications



# 4-Function Massaging Handshower w/Slide Bar & Bracket

**Models:** 3867, 3867BB, 3867BN, 3867CP, 3867PM, 3867P, 3867ST, 3867ORB, 3867AZ

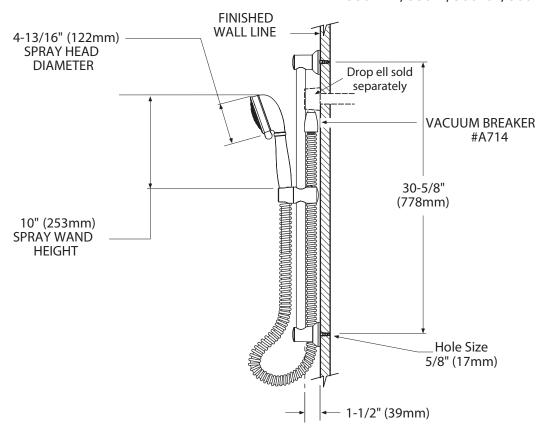

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)




#### **DESCRIPTION**

 Metal construction with chrome plated, antique nickel, antique bronze, LifeShine® brushed bronze, LifeShine® brushed nickel, LifeShine® hammered nickel, nickel, oil rubbed bronze, LifeShine® polished brass, platinum, pewter, LifeShine® satine, glacier or wrought iron finishes


#### **WARRANTY**

 Warranted for one year against material or manufacturing defects

## Specifications



**Models:** A725, A725AN, A725AZ, A725BB, A725BN, A725HN, A725NL, A725ORB, A725P, A725PM, A725PW, A725ST, A725W, A725WR

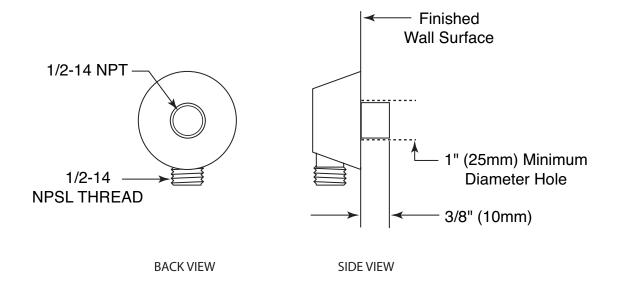

### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



#### **DESCRIPTION**

- Metal construction with vatious finishes identified by suffix OPERATION
- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to ± 3.6°F (± 2°C)

#### **STANDARDS**

- Third party certified to ASME A112.18.1/CSA B-125.1
- ADA 🕒 for lever handles

#### **WARRANTY**

Rev. 11/07

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

## Specifications




# KINGSLEY™ MOENTROL® with Built-In 3 Function Transfer Valve Trim

Models: T4111 series

Valves: 3330 series,

3320 series

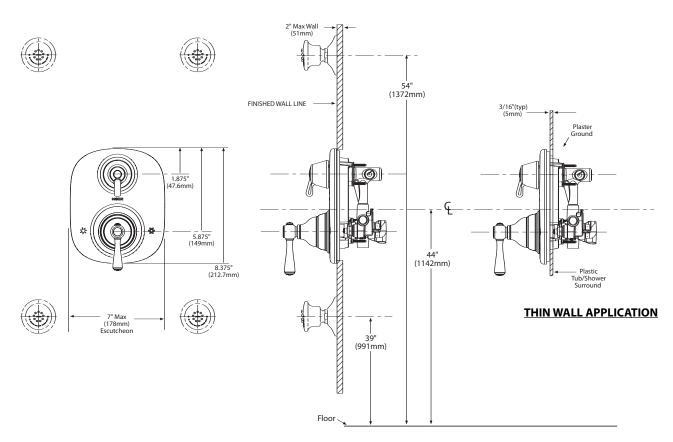

### **THICK WALL APPLICATION**

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



#### **DESCRIPTION**

- Fixed mount showerhead only
- Nonmetallic spray face and shell
- Brass swivel ball assembly
- Available in Chrome, Lifeshine\* Polished Brass, Platinum, Lifeshine\* Satine\*, Oil Rubbed Bronze, Wrought Iron, Antique Nickel, Lifeshine\* Brushed Nickel, Pewter or Antique Bronze finish

#### **FLOW**

Rev. 1/07

• Designed to deliver 2.5 gpm (9.5 L/min) at 60 psi

#### **STANDARDS**

 Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B125.1 and all requirements referenced therein

#### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

## Specifications



### Moenflo® XL Single Function Showerhead

**Models:** 6302, 6302P, 6302PM, 6302ST, 6302ORB, 6302WR, 6302AN, 6302BN, 6302PW, 6302AZ

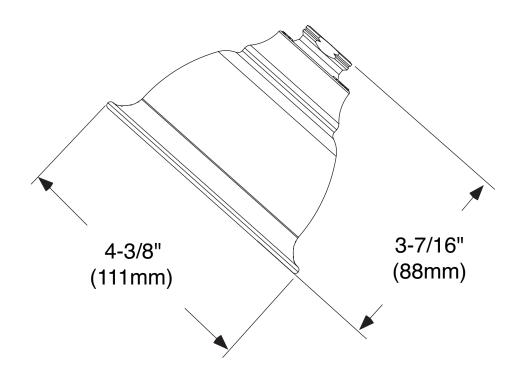

### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com