Eva[™] Technical Specification

Paper Holder

YB2808


Stock Numbers:

- YB2808BN Pivoting Paper Holder
 Brushed Nickel Finish
- q YB2808CH Pivoting Paper Holder Chrome Finish
- YB2808ORB Pivoting Paper Holder
 Oil Rubbed Bronze Finish

Materials:

Paper Holder is constructed of zinc.

Dimensions:

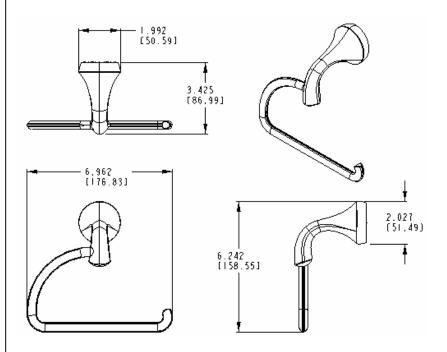

Installation Instructions:

This product features the Pro+Fit Installation Mounting System. If you do not have the Pro+Fit Installation Template please use the following instructions. (Note: only one hole is required per mounting post.)

- 1. Mark on the wall where you want to install the product.
- 2. Using ¼" drill bit, drill one pilot hole for the post.
- 3. Position mounting post to wall by inserting wall anchor into pilot hole and pressing firmly.
- 4. Make sure that locking tab on mounting post is facing down (6 o'clock).
- 5. Tighten wall anchor screw while holding mounting post firmly in place. DO NOT over tighten (6 8 full turns will secure the anchor).
- Attach post by pressing firmly to mounting post until it clicks. (The square opening at the base of the post must be facing down to match-up with locking tab.)

If you are mounting any parts into a hard surface snap off the anti-rotation fins on the back of the mounting post.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:	Paper Holder
By Creative Specialties	·



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.CSI.MOEN.COM

©Copyright Creative Specialties International 2006

Literature #BA1345

Eva[™] Technical Specification

18" & 24" Towel Bar

YB2818 & YB2824


Stock Numbers:

- q YB2818BN 18" Towel Bar Brushed Nickel Finish
- q YB2824BN 24" Towel Bar Brushed Nickel Finish
- q YB2818CH 18" Towel Bar Chrome Finish
- q YB2824CH 24" Towel Bar Chrome Finish
- q YB2818ORB 18" Towel Bar Oil Rubbed Bronze Finish
- q YB2824ORB 24" Towel Bar Oil Rubbed Bronze Finish

Materials:

Towel bar posts are constructed of zinc. Bar is constructed of aluminum.

Dimensions:

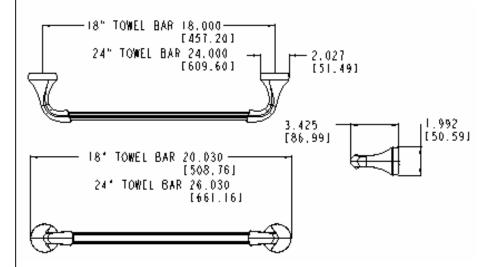

Installation Instructions:

This product features the Pro+Fit Installation Mounting System. If you do not have the Pro+Fit Installation Template please use the following instructions. (Note: only one hole is required per mounting post.)

- 1. Find the appropriate center to center measurement for the product you are installing.
- 2. Mark that distance on the wall where you want to install the product.
- 3. Use a level to ensure that the pilot holes will be perfectly level.
- 4. Using ¼" drill bit, drill one pilot hole for each post 18" apart for the 18" towel bar (24" for the 24" towel bar).
- Position mounting post to wall by inserting wall anchor into pilot hole and pressing firmly.
- 6. Make sure that locking tab on mounting post is facing down (6 o'clock).
- 7. Tighten wall anchor screw while holding mounting post firmly in place. DO NOT over tighten (6 8 full turns will secure the anchor).
- 8. Towel bar must be attached to mounting posts as a unit insert towel bar into each post.
- Attach posts by pressing firmly to mounting posts until it clicks. (The square opening at the base of the post must be facing down to match-up with locking tab.)

If you are mounting any parts into a hard surface snap off the anti-rotation fins on the back of the mounting posts.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:	 Towel Bar
By Creative Specialties	

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.CSI.MOEN.COM

©Copyright Creative Specialties International 2006

Literature #BA1346



Eva[™] Technical Specification

Tank Lever

YB2801

Stock Numbers:


- q YB2801BN Tank Lever Brushed Nickel Finish
- q YB2801CH Tank Lever Chrome Finish
- q YB2801ORB Tank Lever Oil Rubbed Bronze Finish

Installation Instructions:

- 1. Remove existing tank lever.
- Remove the arm mechanism from the new tank lever by loosening screw A.
- 3. Position the new tank lever through the flush tank hole.
- The tank lever handle should be pointing away from the toilet bowl.
- Install the nut inside the tank and tighten. Depending on the curvature of the tank, there might be a slight gap between the outside of the tank and the base of the lever.
- Loosen, but do not remove screw B on the arm mechanism.
- 7. Replace the entire arm mechanism onto the tank lever.
- 8. Tighten screw A.
- Adjust the arm mechanism so it does not come in contact with the tank wall or any part of the flush mechanism parts inside the tank.
- Tighten the adjustment screw (screw B) on the arm mechanism.
- Attach the flapper valve chain to one of the three holes provided on the arm.
- 12. Make sure that the arm does not activate, and no water is leaking thru the flapper valve when the handle is in its normal position, (not flushing).



Dimensions:

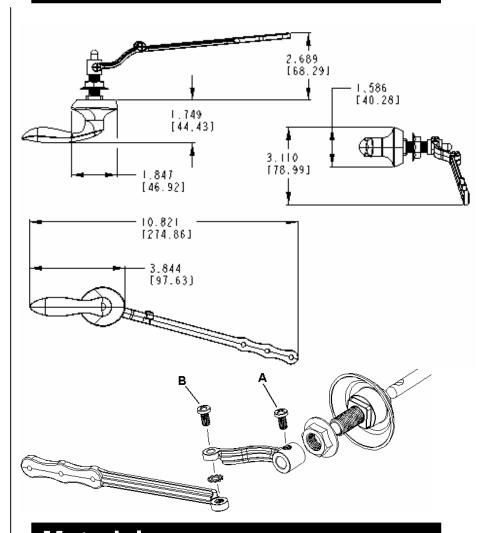

Materials:

Tank Lever is constructed of zinc. The arm mechanism is constructed of brass.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:_____Tank Lever
By Creative Specialties

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.CSI.MOEN.COM

©Copyright Creative Specialties International 2006

Literature #BA1343