

Specifications

DESCRIPTION Metal construction with various finishes identified by suffix 1/2" IPS connections

- · Hot and cold temperature indicators available
- · Includes metal pop-up waste assembly

OPERATION

- Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE


- 1224 cartridge design
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Third party certified to WaterSense,* ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein including NSF61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




VOSS™ Two Handle Widespread Lavatory Faucet

Models: T6905 series

Valve: 9000, 69000

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3 HOLES, 1" MIN. DIA.



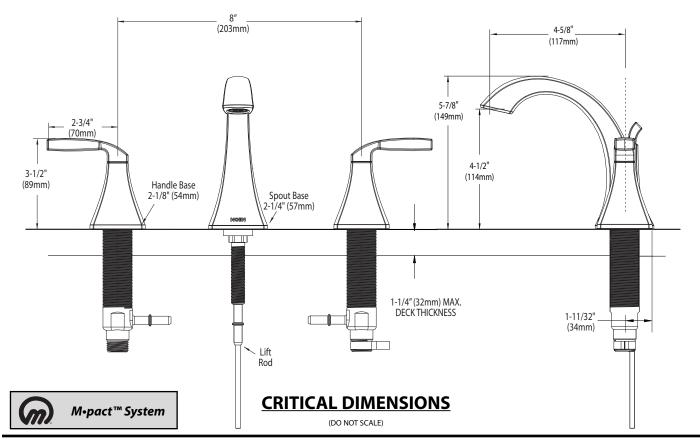

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com


Voss™ Technical Specification **Pivoting Paper Holder**


YB5108


Stock Numbers:

- YB5108BN Pivoting Paper Holder **Brushed Nickel Finish**
- YB5108CH Pivoting Paper Chrome Finish
- YB5108ORB Pivoting Paper Oil Rubbed Bronze Finish

Dimensions:

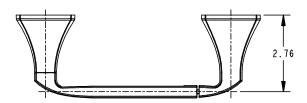

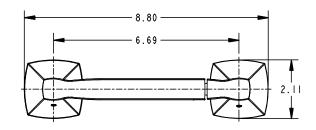



Materials:

Paper Holder is constructed of zinc.

Installation Instructions:

- 1. Position the mounting template on the wall in the desired location. Using a level, align the template and tape it to the wall.
- 2. Remove each mounting post from the body by loosening the set
- 3. Place each mounting post on the template with notch facing down.
- 4. Mark the 2 large hole locations of each mounting bracket.
- 5. Attach each mounting bracket to the wall, using the wall anchors provided.
- 6. Mount each base on the corresponding mounting bracket. Check and make sure that the base set screw hole(s) are facing down. Assemble a set screw to each base. Use the allen wrench included in hardware kit to tighten each set screw and secure the assembly to the mounting bracket(s).
- 7. Tighten all 4 screws. Do not over tighten.
- 8. Place each post over the mounting plate (set screw down). Pivoting post with bar to be on left side. Tighten both set screws.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:	Paper Holder
By Creative Specialties	·



25300 AL MOEN DRIVE • NORTH OLMSTED. OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM

©Copyright Creative Specialties International

Voss™ Technical Specification

24" Towel Bar

YB5124


Stock Numbers:

- □ YB5124BN 24" Towel Bar Brushed Nickel Finish
- □ YB5124CH 24" Towel Bar Chrome Finish
- ☐ YB5124ORB 24" Towel Bar
 Oil Rubbed Bronze Finish

Dimensions:



LENGTH	18"	24"
DIM "A"	18.00"	24.00"
DIM "B"	2.11"	2.11"
DIM "C"	20.11"	26.11"
DIM "D"	2.92"	2.92"





Materials:

Towel Bar Posts are constructed of zinc and **towel bar** is constructed of stainless steel.

Installation Instructions:

- 1. Position the mounting template on the wall in the desired location. Using a level, align the template and tape it to the wall.
- 2. Remove each mounting post from the body by loosening the setscrew.
- 3. Place each mounting post on the template with notch facing down.
- 4. Mark the 2 large hole locations of each mounting bracket.
- 5. Attach each mounting bracket to the wall, using the wall anchors provided.
- 6. Mount each base on the corresponding mounting bracket. Check and make sure that the base set screw hole(s) are facing down. Assemble a set screw to each base. Use the allen wrench included in hardware kit to tighten each set screw and secure the assembly to the mounting bracket(s).
- 7. Tighten all 4 screws. Do not over tighten.
- 8. Place each post over the mounting plate (setscrew down). Pivoting post with bar to be on left side. Tighten both setscrews.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:	24"	Towel Bar
By Creative Specialties		

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM



Voss™ Technical Specification

Towel Ring

YB5186


Stock Numbers:


- □ YB5186BN Towel Ring Brushed Nickel Finish
- □ YB5186CH Towel Ring Chrome Finish
- YB5186ORB Towel Ring
 Oil Rubbed Bronze Finish


Materials:

Towel Ring is constructed of zinc.

Dimensions:







Installation Instructions:

- Remove the mounting bracket from the body by loosening the setscrew.
- 2. Position the assembled unit on the wall where desired.
- 3. Lightly mark the outline of the base.
- 4. Center a mounting bracket within the base outline with "UP" facing you.
- 5. Attach the mounting bracket to the wall, using the wall anchors provided.
- Mount the base on the corresponding mounting bracket. Check and make sure that the base set screw hole is facing down. Assemble a set screw to the base. Use the allen wrench included in the hardware kit to tighten the set screw and secure the assembly to the mounting bracket.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Dry well. Do not use commercial or abrasive cleaners.

Stock Number:	Towel	Ring
By Creative Specialties		Ī



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070 CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636 INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726 CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720 WWW.MOEN.COM